


Safety relay monostable

OA 5669. __ /3 __ __

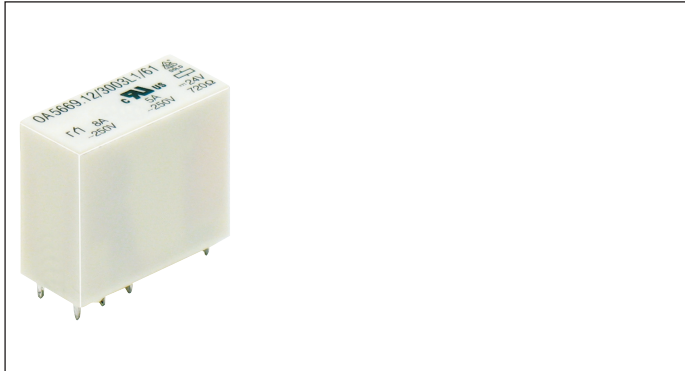

- Acc. to DIN EN 50205, DIN EN 61810-1, DIN EN 60664-1
- For high ambient temperature up to + 85°C
- With forcibly guided contacts
- **Double and reinforced insulation between contact sets according to EN 50178**
- Low rated power consumption
- High mechanical service life
- Compact size, small height
- As option wash proof RT III

Applications

- Switchgear for safety technology
- Press controls

Approvals and Markings



Technical Data

Relaistyp		OA 5669	
1.0 Relay coil			
1.1	Nominal voltage	DC V	6; 12; 24; 48; 60; 110 (others on request)
1.2	Nominal consumption	W	0.8
1.11	Voltage range	U _N	0.75 ... 1.4
1.13	Holding Power (at 0.5 x U _N)	W	0.2
2.0 Contacts			
2.1	Contact arrangements	2 changeover contacts, 1 NC and 1 NO	
2.2	Contact material	AgSnO ₂ + 0.2 µm Au; AgNi + 0.2 µm Au, AgNi + 5 µm Au	
2.3	Rated insulation voltage	AC V	250
	Switching voltage min./max.	V	AC/DC 10 / DC 250, AC 400 (AC/DC 100 mV / 60 V) ¹⁾
2.4	Limiting continuous current I _{th}	A	2 x 5 (see operating voltage limit curve)
	Switching current min./max.	A	10 mA ³⁾ / 8 (1 mA / 0.3 A) ¹⁾
2.5	Switching power min./max.	VA	3 / 2 000 (1 mVA / 7 VA) ¹⁾
	Switching power min./max.	W	3 / 200 (1 mW / 7 W) ¹⁾ (s. limit curve for arc-free operation)
2.6	Switching capacity	R300	
	to IEC/EN 60947-5-1 AC 15 ⁴⁾	AC V/A	NO: 250 / 2 NC: 250 / 1
	to IEC/EN 60947-5-1 AC 15 ⁵⁾	AC V/A	NO: 250 / 3 NC: 250 / 2
	to IEC/EN 60947-5-1 DC 13 ⁴⁾	DC V/A	NO: 24 / 1 NC: 24 / 1
	at 0.1 Hz DC 13 ⁴⁾	DC V/A	NO: 24 / 4 NC: 24 / 4
	to UL 508		
2.7	Electrical life	switching cycles	at 1 s On, 1 s Off (see contacts service life)
	at AC 230 V, 6 A, cosφ = 1	switching cycles	> 1 x 10 ⁵ AgNi > 2 x 10 ⁵ AgSnO ₂
2.8	max. switching frequency	switching cycles/s	10
2.9	Response time / Release time	ms	≤ 15 / ≤ 12
2.10	Contact force NO / NC	cN	≥ 13 / ≥ 10
3.0 Other			
3.1	Mechanical life	switching cycles	≥ 50 x 10 ⁶
3.2	Temperature range	°C	- 40 ... + 85 mounted without distance (I _{th} = 2 x 5 A)
3.3	Degree of protection	Solder line proof RT II as option wash proof RT III	
3.5	Vibration resistance	10 ... 200 Hz; NC 2 g; NO 10 g; IEC/EN 60068-2-6	
3.6	Climate resistance	40 / 085 / 04 (climate category); A/B/D IEC/EN 60068-1	
3.7	Short circuit strength 1 kA / AC 250 V	AgSnO ₂	10 A gL EN 60947-5-1
		AgNi	6 A gL EN 60947-5-1

¹⁾ Values for AgNi-contacts + 5 µm Au

²⁾ 10 A total current at t = 20°C and coil voltage = U_N

³⁾ Typical values

⁴⁾ Values for AgNi-contacts

⁵⁾ Values for AgSnO₂-contacts

Technical Data

3.8	Insulation acc. to IEC 60664-1, EN 50178		double and reinforced insulation
	Rated insulation voltage	AC V	250
	Contamination level		2
	Overvoltage category		III
	Test voltage		
	Contact-coil (1 min)	AC kV eff.	≥ 4
	Contact-contact (1min)	AC kV eff.	≥ 4
	Open contact acc. to DIN EN 61810-1	AC kV eff.	1.5
	Transient voltage		
	Contact-coil (1.2 - 50 µs)	kV	≥ 6
	Clearance and creepage distances		
	Contact-coil	mm	≥ 8
	Contact-contact	mm	≥ 5.5
3.9	Weight	g	approx. 19
4.0 Packing			
4.1	on cardboard	piece	56
4.2	in case package	piece	280
5.0 Solder method			
5.1	Solder method /-temperature /-duration	°C / s	Wafer soldering / 260 / 5

Design Versions


U _N (DC V)	Voltage range (DC V)	Resistance at 20°C	AgNi-contacts + 0,2 µm Au		
			OA 5669.12	OA 5669.16	
6	4,5 ... 7,8	44	3001	3011	3501
12	9,0 ... 16,8	175	3002	3012	3502
24	18,0 ... 33,6	720	3003	3013	3503
48	36,0 ... 67,0	2880	3004	3014	3504
60	45,0 ... 84,0	4500	3005	3015	3505
110	82,0 ... 154	15000	3006	3016	3506
				1)	2)

U _N (DC V)	AgNi - contacts + 5 µm Au			AgSnO ₂ - contacts + 0,2 µm Au		
	OA 5669.12	OA 5669.16		OA 5669.12	OA 5669.16	
6	3031	3041	3511	3061	3071	3521
12	3032	3042	3512	3062	3072	3522
24	3033	3043	3513	3063	3073	3523
48	3034	3044	3514	3064	3074	3524
60	3035	3045	3515	3065	3075	3525
110	3036	3046	3516	3066	3076	3526
		1)	2)		1)	2)






1) = Pin configuration standard

2) = Pin configuration reverse

Ordering Example



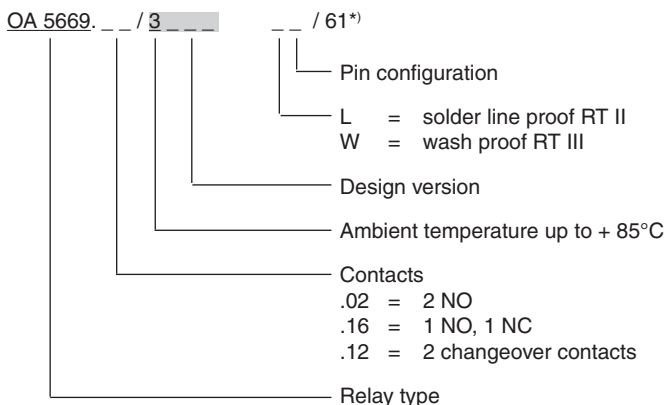


*) /61 cURus approval





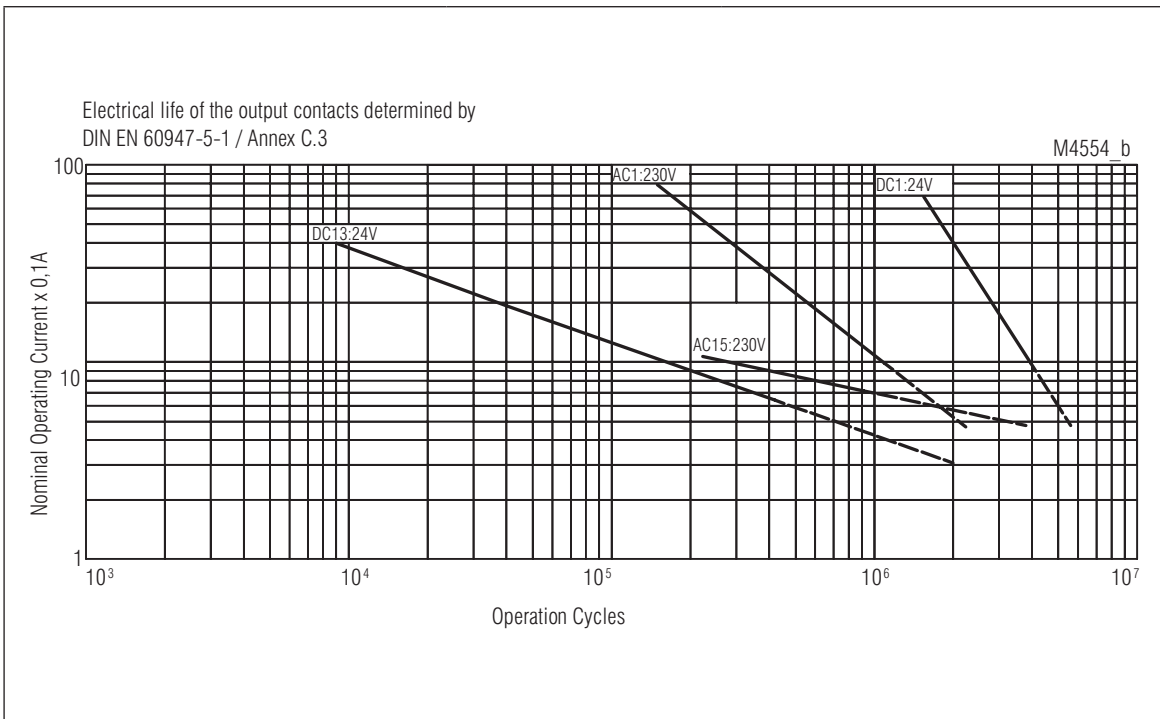
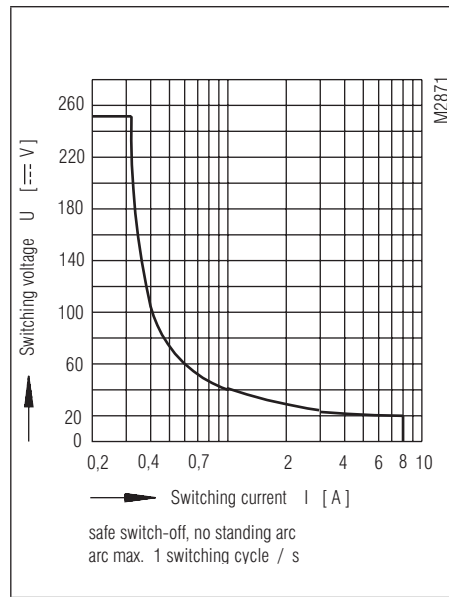
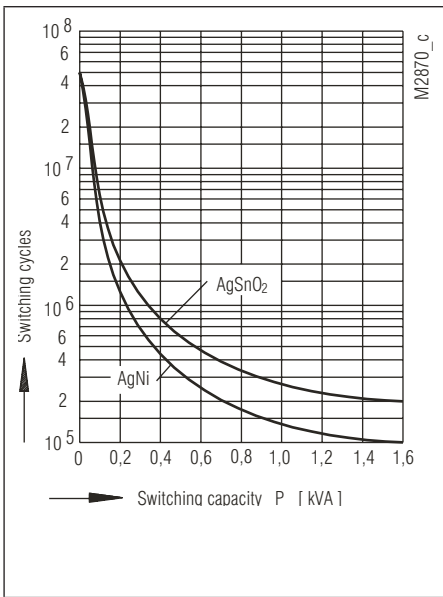
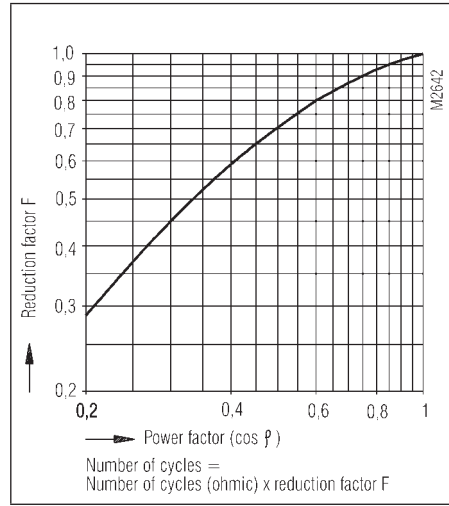
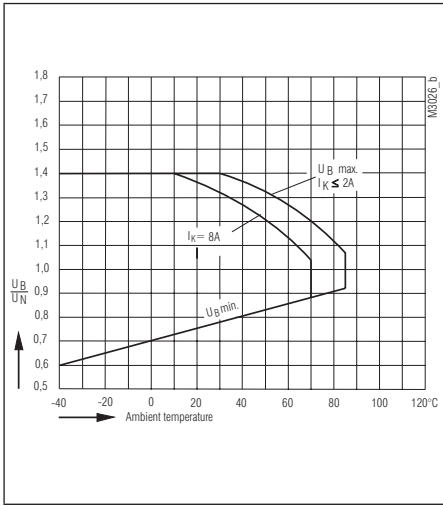


Bohrbild (Lötseite)

Pin configuration standard

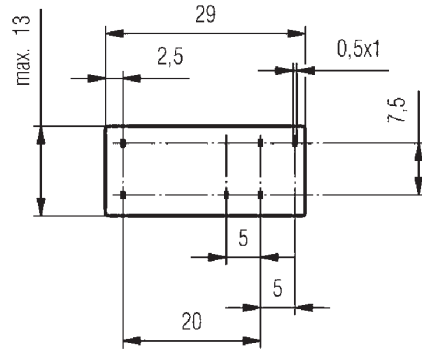

Pin configuration reverse

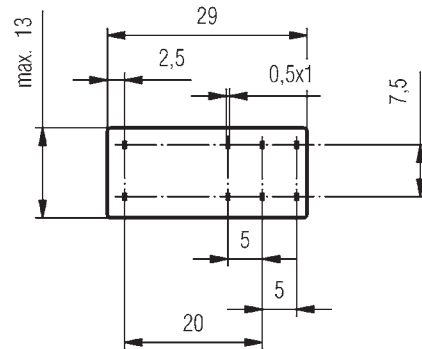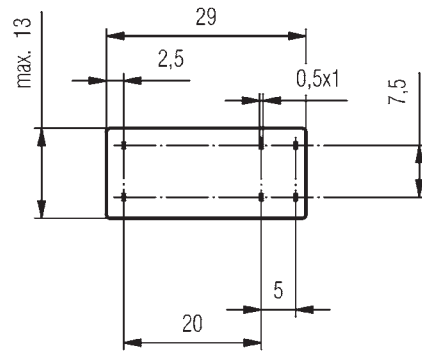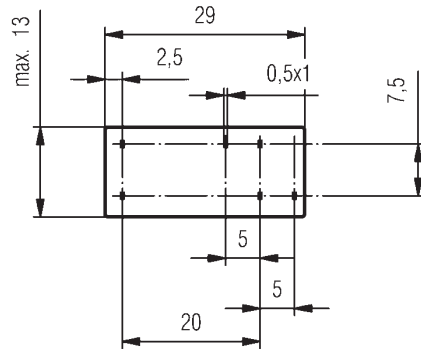

Connection for basic grid dimensions 2.5 mm as well as 2.54 mm according to IEC/EN 60097 and IEC 60326 average

Socket ET 1415.021 Fixing clip ET 1415.025	Socket ET 1415.041	Socket ET 1415.044	Socket ET 1415.047								
	<ul style="list-style-type: none"> • Socket for DIN-rail • incl. fixing clip 	<ul style="list-style-type: none"> • Socket for DIN-rail • incl. fixing clip • incl. safe separation between coil and contacts according to DIN EN 60947-1, DIN EN 61140, DIN EN 60204 									
	<p>Fixing clip</p> <p>Screw terminals</p>	<p>Fixing clip</p> <p>Screw terminals</p>	<p>Fixing clip</p> <p>Cage clamp terminals</p>								
Article number: 0034769	Article number: 0055571	Article number: 0059274	Article number: 0059270								
Fixing clip (wire): 0034770 Fixing clip (plastic): 0047726	<p>Function modules</p> <table border="0"> <tr> <td>ET1415.913: DC 24 V, with free-wheel diode and green LED</td> <td>Article number: 0056828</td> </tr> <tr> <td>ET1415.911: DC 24 V, with free-wheel diode and red LED</td> <td>Article number: 0055909</td> </tr> <tr> <td>ET1415.924: DC 60 V, with free-wheel diode and red LED</td> <td>Article number: 0062552</td> </tr> <tr> <td>ET1415.912: AC/DC 24 V, with varistor and green LED</td> <td>Article number: 0055910</td> </tr> </table>			ET1415.913: DC 24 V, with free-wheel diode and green LED	Article number: 0056828	ET1415.911: DC 24 V, with free-wheel diode and red LED	Article number: 0055909	ET1415.924: DC 60 V, with free-wheel diode and red LED	Article number: 0062552	ET1415.912: AC/DC 24 V, with varistor and green LED	Article number: 0055910
ET1415.913: DC 24 V, with free-wheel diode and green LED	Article number: 0056828										
ET1415.911: DC 24 V, with free-wheel diode and red LED	Article number: 0055909										
ET1415.924: DC 60 V, with free-wheel diode and red LED	Article number: 0062552										
ET1415.912: AC/DC 24 V, with varistor and green LED	Article number: 0055910										

