



## DESCRIPTION

### Open programmable compact safety control

- integrated movement monitoring of one axis with extended encoder functionality
- 5 Encoder interfaces
- 14 Digital inputs
- 2 Relay outputs
- 2/4 pn- or pp- switching outputs
- 2 Auxiliary / pulse outputs
- Safety controller up to PL e acc. to EN ISO 13849-1 or SIL3 acc. to IEC 61508
- optional: safe/non-safe fieldbus interface

## CHARACTERISTIC OF THE MODULE

- » Extendable up to:
  - max. 42 safe digital inputs,
  - max. 12 safe digital outputs,
  - max. 20 safe digital I/O's,
  - max. 9 safe relay outputs,
  - max. 10 auxiliary outputs,
  - max. 1 safe axis
- » Logic processing up to PL e acc. to EN ISO 13849-1 or SIL 3 acc. to IEC 61508
- » Movement monitoring for one axis up to PL e acc. to EN ISO 13849-1 or SIL 3 acc. to IEC 61508
- » Speed monitoring:
  - » RPM-monitoring
  - » Standstill monitoring
  - » Sense of rotation monitoring
  - » Safe incremental dimension
  - » Emergency Stop monitoring
  - » Position monitoring
  - » Position range monitoring
  - » trend range monitoring
  - » Target position monitoring
- » Freely programmable modular controller for up to 800 IL instructions
- » Logic diagram oriented programming via SafePLC<sup>2</sup>
- » Pulse outputs for cross-shorting detection of digital input signals
- » External contact monitoring of connected switchgear (EMU)
- » Switchable safe semi-conductor outputs pn-, pp- switching for safety-relevant functions

# SMX 11-2/2/x

SMXSERIES » Compact » Basic modules

**BBH**  
PRODUCTS

- » Monitored relay outputs for safety relevant functions
- » Comprehensive diagnostics functions integrated
- » Parameter management for expansion modules in base device
- » Coded status display via front-side 7 segment display and status LEDs
- » Multifunction buttons (quit, start, reset) can be operated from the front side
- » Configurable via SafePLC<sup>2</sup> über USB serial adapter or ethernet based field bus
- » Extended functionality:
  - allows the connection of 2 rotary encoder per axis (SSI-Absolut, Sin/Cos,TTL, HTL proximity switch)
  - 2. encoder interface also support HTL (200 kHz), Sin/Cos High-Resolution and Resolver
- » Optional: integrated Communication interface :
  - Standard and safe field bus protocols for communication with a higher level controller (PROFIBUS, PROFINET, DeviceNet, CANopen, EtherNET/IP, EtherCAT, Modbus TCP, PROFIsafe, FSofE)
  - Safe cross communication (SMMC) for data exchange between multiple base devices
  - Field bus protocols with the same hardware can be switched with SafePLC<sup>2</sup>
  - Safe remote I/O communication for data exchange with distributed I/O systems
- » The mechanical structure of SMX11-2/2 (/x\*) is depended on the respective forms of the base module

\* Optional: integrated communication interface (/DNM, /DBM)

BBH PRODUCTS GMBH

Böttgerstraße 40  
D- 92637 Weiden

[www.bbh-products.de](http://www.bbh-products.de)

Tel.: + 49 961/4 82 44-0  
Fax: + 49 961/4 82 44-35

[contact@bbh-products.de](mailto:contact@bbh-products.de)

**SAFETY @ ITS BEST!**

## SAFETY RELATED CHARACTERISTIC DATA

|                        |                                  |
|------------------------|----------------------------------|
| Performance Level      | PL e (EN ISO 13849-1)            |
| PFH / architekture     | 12,6 FIT / Cat 4                 |
| Safety Integrity Level | SIL 3 (IEC 61508)                |
| Proof test interval    | 20 years = max. operating period |

## GENERAL DATA

|   |   |
|---|---|
| Max. no. of expansion modules                         | 2   |
| Interface for expansion modules                       | T-bus connector, pluggable in top-hat rail  |
| Number of safe digital inputs                         | 14  |
| Number of safe digital outputs                        |   |
| pp-switching **                                       | 4   |
| pn-switching **                                       | 2   |
| Number of safe digital I/O                            | –   |
| Number of relay outputs                               | 2   |
| Number of safe analogue inputs                        | –   |
| Number of auxiliary outputs                           | 2   |
| Number of pulse outputs (clock outputs)               | 2   |
| Type of connection                                    | Plug-in terminals with spring or screw connection   |
| Axis monitoring (Axes / Ecoder interfaces)            | 1 / 5 *   |
| Encoder technology (See table Encoder specifications) | <b>D-SUB X31:</b><br>SSI-Absolut, SinCos, Incremental-TTL<br><b>D-SUB X33:</b><br>SSI-Absolut, SinCos, SinCos (HighRes),<br>Incremental-TTL, Resolver<br><br><b>Terminal X23:</b><br>HTL-proximity sensor (10kHz)<br><b>Terminals X27, X28:</b><br>Incremental-HTL (200kHz) |

\* maximum 2 encoder / axis

\*\* pn/pp are configurable via SafePLC<sup>2</sup>

## ELECTRICAL DATA

|                                |  |                         |
|--------------------------------|--|-------------------------|
| Supply voltage (tolerance)     | 24 VDC; 2A (-15%, +20%)                |                         |
| Fuse                           | X11.1                                  | min. 30 VDC; max. 3,15A |
|                                | X11.2                                  | min. 30 VDC; max. 10A   |
| Max. Power consumption (logic) |  |                         |
| SMX 11-2/2                     | 3,5 W                                  |                         |
|                                | SMX 11-2/2/x                           | 6,8 W                   |
| Rated data digital inputs      | 24 VDC; 20 mA Typ1 acc. to IEC 61131-2 |                         |
| Rated data digital outputs     |  |                         |
| pn-switching                   | 24 VDC; 2A *                           |                         |
|                                | pp-switching                           | 24 VDC; 2A *            |
| auxiliary outputs              | 24 VDC; 250mA                          |                         |
|                                | pulse outputs<br>(clock outputs)       | 24 VDC; 250mA           |
| Rated data relays              |  |                         |
| Normally open                  | DC 13                                  | 24 VDC; 2A              |
|                                | AC 15                                  | 230 VAC; 2A             |

\* see „Derating Outputs“

## DERATING OUTPUTS

- » Maximum current load based on temperature
- » The maximum total current is 10A

| type of module | outputs   | temperature 30°C / 50°C |
|----------------|-----------|-------------------------|
| SMX1x/2/x      | Q 1 – Q 4 | 2A / 1,8A               |

## ENVIRONMENTAL DATA


|   |   |
|---|---|
| Temperature                                       | 0°C ... +50°C operation<br>-25°C ... +70°C storage and transport                                      |
| Class of protection                               | IP 20   |
| Climatic category                                 | 3K3 acc. to DIN EN 60721-3  |
| Min-, Maximum relative humidity (no condensation) | 5% - 85%  |
| EMC   | DIN EN 61000-6-2, DIN EN 61000-6-4, DIN EN 61000-6-7,<br>DIN EN 61800-3, DIN EN 61326-3, DIN EN 62061 |
| Operating altitude                                | 2000m   |

## MECHANICAL DATA

|                                   |               |                          |
|-----------------------------------|---------------|--------------------------|
| Dimensions (HxDxW [mm])           | SMX11-2/2     | 100x115x67,5             |
|                                   | SMX11-2/2/x * | 100x115x90               |
| Weight [g]                        | SMX11-2/2     | 390                      |
|                                   | SMX11-2/2/x * | 490                      |
| Mounting                          |               | to snap on top-hat rail  |
| Number of T-Bus                   |               |                          |
|                                   | SMX11-2/2     | 3                        |
|                                   | SMX11-2/2/x * | 4                        |
| Min. terminal cross-section / AWG |               | 0,2 mm <sup>2</sup> / 24 |
| Max. terminal cross-section / AWG |               | 2,5 mm <sup>2</sup> / 12 |

\* Specification, see: „Optional integrated communication interface“

## DEVICE INTERFACES

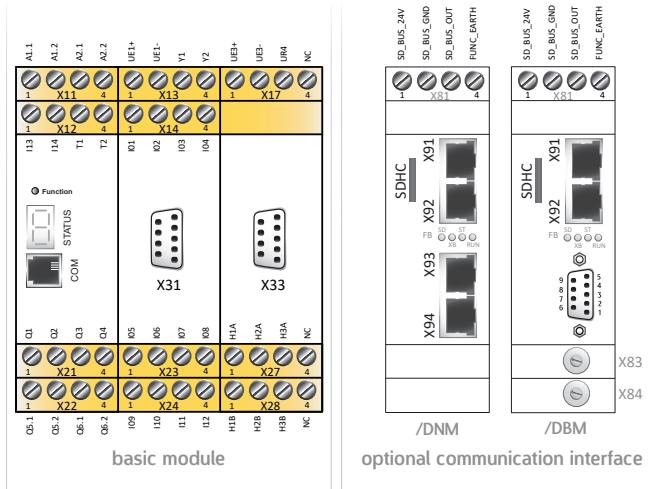

| Interface                   | Description of interface                  |
|-----------------------------|---|
| X11 – X14 / X17 – X24 / X81 | Voltage supply and I/O interface          |
| COM                         | Diagnostic- and configuration interface   |
| X91 / X92                   | Decentralised SDDC ETH and SMMC interface |
| X93 / X94                   | Field bus interfaces                      |
| X23 / X27 – X28             | Encoder interface                         |
| X31 – X33                   | Encoder interface                         |

## VOLTAGE SUPPLY AND I/O INTERFACE

| X 11 |                                       |
|------|---------------------------------------|
| Pin  | Function                              |
| 1    | Voltage supply device +24 VDC         |
| 2    | Voltage supply device +24 VDC outputs |
| 3    | Voltage supply device 0 VDC           |
| 4    | A2.2                                  |

| X 12 |          |
|------|----------|
| Pin  | Function |
| 1    | I13      |
| 2    | I14      |
| 3    | T1       |
| 4    | T2       |

| X 13 |          |
|------|----------|
| Pin  | Function |
| 1    | UE1+     |
| 2    | UE1-     |
| 3    | Y1       |
| 4    | Y2       |

| X 14 |          |
|------|----------|
| Pin  | Function |
| 1    | I01      |
| 2    | I02      |
| 3    | I03      |
| 4    | I04      |

BBH PRODUCTS GMBH

Böttgerstraße 40  
D- 92637 Weiden

[www.bbh-products.de](http://www.bbh-products.de)

Tel.: + 49 961/4 82 44-0  
Fax: + 49 961/4 82 44-35

[contact@bbh-products.de](mailto:contact@bbh-products.de)

**SAFETY @ ITS BEST!**

# SMX 11-2/2/x

SMXSERIES » Compact » Basic modules

**BBH**  
PRODUCTS

| X 17 |   |
|------|---|
| Pin  | 1 - UE3+ Voltage supply Encoder +24V DC X33 |
|      | 2 - UE3- Voltage supply Encoder 0V DC X33   |
|      | 3 - UR3 Reference voltage encoder X33       |
|      | 4 - NC No function                          |

| X 21 |   |
|------|---|
| Pin  | 1 - Q1 Output of the pn-switching Q1_PP / pp-switching Q1 |
|      | 2 - Q2 Output of the pn-switching Q2_PN / pp-switching Q2 |
|      | 3 - Q3 Output of the pn-switching Q3_PP / pp-switching Q3 |
|      | 4 - Q4 Output of the pn-switching Q4_PN / pp-switching Q4 |

| X 22 |                            |
|------|----------------------------|
| Pin  | 1 - Q5.1 Safe relay output |
|      | 2 - Q5.2                   |
|      | 3 - Q6.1 Safe relay output |
|      | 4 - Q6.2                   |

| X 23 |         |
|------|---------|
| Pin  | 1 - I05 |
|      | 2 - I06 |
|      | 3 - I07 |
|      | 4 - I08 |

| X 24 |         |
|------|---------|
| Pin  | 1 - I09 |
|      | 2 - I10 |
|      | 3 - I11 |
|      | 4 - I12 |

| X 81 * |  |
|--------|--|
| Pin    | 1 - SD_BUS_24V Power supply SD-BUS +24 VDC |
|        | 2 - SD_BUS_GND Power supply SD-BUS 0 VDC   |
|        | 3 - SD_BUS_OUT SD-BUS Output               |
|        | 4 - FUNC_EARTH Functional Earth            |

\* only available for field bus variants

## DIAGNOSTIC AND CONFIGURATION INTERFACE

### Pin assignment

| RJ 10, 4-pin |             |   |
|--------------|-------------|---|
| Pin          | Description | COM front side  |
| 1            | GND         |   |
| 2            | RS485-      |   |
| 3            | RS485+      |   |
| 4            | VCCH        |  |

» With existing Ethernet-based fieldbus interface, it can be used as a diagnostic and configuration interface.

BBH PRODUCTS GMBH

Böttgerstraße 40  
D- 92637 Weiden

[www.bbh-products.de](http://www.bbh-products.de)

Tel.: + 49 961/4 82 44-0  
Fax: + 49 961/4 82 44-35

[contact@bbh-products.de](mailto:contact@bbh-products.de)

**SAFETY @ ITS BEST!**

## DECENTRALIZED SDDC ETH AND SMMC INTERFACE

### Pin assignment female connector

| Communication interface (RJ45-Buchse) |      |                 |              | Front side |
|---------------------------------------|------|-----------------|--------------|------------|
| Pin                                   | Name | Description     | Colour       | X91 / X92  |
| 1                                     | TX+  | Transmit Data + | white-orange |            |
| 2                                     | TX-  | Transmit Data - | orange       |            |
| 3                                     | RX+  | Receive Data +  | white-green  |            |
| 4                                     | nc   | not used        | blue         |            |
| 5                                     | nc   | not used        | white-blue   |            |
| 6                                     | RX-  | Receive Data -  | green        |            |
| 7                                     | nc   | not used        | white-brown  |            |
| 8                                     | nc   | not used        | brown        |            |

### Safe Master – Master Communication (SMMC)

SMMC communication enable a secure data exchange of 2 bytes between multiple SDDC masters. Communication takes place without a master for coordinating the data. This means that data exchange between available subscribers is always possible. This principle means that an incomplete or separates network can work in part areas without changing the configuration.

Each port can be configured in the SafePLC<sup>2</sup>.

## FIELDBUS INTERFACES

### Pin assignment female connector

| Ethernet-based fieldbus interface /xNx (RJ45) |      |                 |              | Front side |
|---|------|-----------------|--------------|------------|
| Pin   | Name | Description     | Colour       | X93 / X94  |
| 1   | TX+  | Transmit Data + | white-orange |            |
| 2   | TX-  | Transmit Data - | orange       |            |
| 3   | RX+  | Receive Data +  | white-green  |            |
| 4   | nc   | not used        | blue         |            |
| 5   | nc   | not used        | white-blue   |            |
| 6   | RX-  | Receive Data -  | green        |            |
| 7   | nc   | not used        | white-brown  |            |
| 8   | nc   | not used        | brown        |            |

### CAN-based fieldbus interface /DBM, /xBM (D-Sub)

| Pin | CANopen | PROFIBUS      | DeviceNet | Front side |
|-----|---------|---------------|-----------|------------|
| 1   | —       | —             | V-        |            |
| 2   | CAN_L   | —             | CAN_H     |            |
| 3   | isoGND  | RXD/TXD-P (B) | DRAIN     |            |
| 4   | —       | CNTR-P        | CAN_L     |            |
| 5   | —       | GND           | V+        |            |
| 6   | —       | VP (+5V)      | —         |            |
| 7   | CAN_H   | —             | —         |            |
| 8   | —       | RXD/TXD-N (A) | —         |            |
| 9   | —       | CNTR-N        | —         |            |

## OPTIONAL INTEGRATED COMMUNICATION INTERFACE

- » Subsequent expansion capability of standard to safe field bus via additional Mini SD card on the back of the module is possible (/xNx und /xBx)
- » Different specifications can be combined

### General data

|  |                         |
|--|-------------------------|
| Decentralised communication interface    |                         |
| /D                                       | 2x RJ 45 *              |
| Fieldbus interface                       |                         |
| /xN                                      | 2x RJ 45 **             |
| /xB                                      | 1x Sub-D ***            |
| MemoryCard (safety program)              |                         |
| /xxM                                     | 1x Mini SD (front side) |
| Memory Card (license for safe field bus) |                         |
| /xNx                                     | 1x Mini SD (rear side)  |
| /xBx                                     |                         |
| SD bus                                   | plug-in terminals       |
| status LEDs                              | 4                       |
| Field bus adress rotary switch           |                         |
| /xBx                                     | 2                       |

\* optional for SDDC or SMMC

\*\* available field buses PROFINET, EtherCAT, Modbus TCP and Ethernet TCP/IP

\*\*\* available field buses PROFIBUS, CANopen und DeviceNet

### Combination options

/D

/DNM

/xNM

/xxM

/DBM

/xBM

| Field bus protocols | /DBM | /xBM | /DNM | /DNM | /xNM |
|---------------------|------|------|------|------|------|
| PROFIBUS            | X    | X    |      |      |      |
| DeviceNet           | X    | X    |      |      |      |
| CANopen             | X    | X    |      |      |      |
| PROFINET            |      |      | X    | X    |      |
| Ethernet IP         |      |      | X    | X    |      |
| EtherCAT            |      |      | X    | X    |      |
| Modbus TCP          |      |      | X    | X    |      |
| PROFlsafe *         | X    | X    | X    | X    |      |
| FSoE *              |      |      | X    | X    |      |

\* Specification required in your order

» The CAN-based and Ethernet-based fieldbus interfaces can be switched via the SafePLC<sup>2</sup> between the fieldbus protocols

## ENCODER INTERFACES

### Pin assignment X31 , X33

| Pin | X31<br>Inc / Sin/Cos / SSI | X33<br>Inc / Sin/Cos / SSI | X33<br>Resolver | Front side<br>SMX |
|-----|----------------------------|----------------------------|-----------------|-------------------|
| 1   | n.c.                       | n.c.                       | Ref_Out +       |                   |
| 2   | GND_ENC                    | GND_ENC                    | GND_ENC         |                   |
| 3   | n.c.                       | n.c / n.c. / Clk +         | Ref_In +        |                   |
| 4   | B- / COS - / Clk -         | B- / COS - / n.c.          | COS -           |                   |
| 5   | A+ / SIN + / Data +        | A+ / SIN + / Data +        | SIN +           |                   |
| 6   | A- / SIN - / Data -        | A- / SIN - / Data -        | SIN -           |                   |
| 7   | n.c.                       | n.c. / n.c. / Clk -        | Ref -           |                   |
| 8   | B+ / COS + / Clk +         | B+ / COS + / n.c.          | COS +           |                   |
| 9   | U_ENC                      | U_ENC                      | U_ENC           |                   |

### Pin assignment X23 , X27 , X28

| Pin | Z1 – Z1 / Z2 – Z2                 | Terminals |
|-----|-----------------------------------|-----------|
| 1   | A ( $\bar{A}$ ) / A ( $\bar{A}$ ) | X23       |
| 2   | -- / B ( $\bar{B}$ )              |           |
| 3   | A ( $\bar{A}$ ) / A ( $\bar{A}$ ) |           |
| 4   | -- / B ( $\bar{B}$ )              |           |

| Pin     | A+/A- | A+ Signal |
|---------|-------|-----------|
| 1 – H1A | A+    | 24V       |
| 2 – H2A | A-    | A         |
| 3 – H3A | A+    | GND       |
| 4 – NC  | —     | —         |

| Pin     | B+/B- | B+ Signal |
|---------|-------|-----------|
| 1 – H1B | B+    | 24V       |
| 2 – H2B | B-    | B         |
| 3 – H3B | B+    | GND       |
| 4 – NC  | —     | —         |

## ENCODERSPECIFICATIONS

### Incremental - TTL

|   |                                       |
|---|---------------------------------------|
| Physical Layer                                | RS-422 compatible                     |
| Measuring signal A/B                          | Track with 90 degree phase difference |
| Type of connection                            | D-SUB 9pole                           |
| Max. frequency of input cycles<br>(X31 / X33) | 200 kHz / 250 kHz                     |

### Sin/Cos

|   |  |
|---|--|
| Physical Layer                                      | RS-422 compatible                      |
| Measuring signal A/B                                | Track with 90 degreee phase differnece |
| Type of connection                                  | D-SUB 9-pole                           |
| Standard Mode                                       |  |
| Max. frequency of input clock pulses<br>(X31 / X33) | 200 kHz / 250 kHz                      |
| High Resolution Mode                                |  |
| Max. frequency of input clock pulses (X33)          | 15 kHz                                 |

### SSI-Absolut

|                |   |
|----------------|---|
| Data interface | Serial Synchronous Interface (SSI) with variable data length of 12 – 28 Bit |
| Data format    | Binary, Gray code   |

# SMX 11-2/2/x

SMXSERIES » Compact » Basic modules

**BBH**  
PRODUCTS

|   |   |
|---|---|
| Physical Layer  | RS-422 compatible                                 |
| Type of connection  | D-SUB 9-pole                                      |
| <b>Mode</b>   | <b>Master or Listener</b>                         |
| SSI-Master operation  |   |
| Clock rate  | 150 kHz   |
| SSI-Listener operation                                      |   |
| Clock rate (X31 / X33)                                      | 100 kHz ... 200 kHz / 100 kHz ... 250 kHz         |
| Min. clock pause time                                       | 150 µsec  |
| Max. clock pause time                                       | 1 msec  |
| <b>Resolver</b>   |   |
| Measuring signal  | Sin/Cos – track with 90° phase difference         |
| Signal frequency  | max. 600 Hz (900 Hz Deep pass)                    |
| Input voltage   | max. 8 Vss (an 16 kΩ)                             |
| Resolution  | 9 Bit / pole                                      |
| Supported pole number                                       | 2 - 16  |
| Type of connection (X33)                                    | D-SUB 9-pole                                      |
| <b>Mode</b>   | <b>Master or Listener</b>                         |
| Resolver-Master operation                                   |   |
| Reference frequency   | 8 kHz   |
| Resolver-Listener operation                                 |   |
| Reference frequency   | 4 kHz – 16 kHz                                    |
| Reference amplitude   | 8 Vss – 28 Vss                                    |
| Reference signal form                                       | Sinusoidal, triangle                              |
| Transformation ratio  | 2:1; 3:1; 4:1                                     |
| Phase fault   | max. 8°   |
| <b>Incremental - HTL</b>                                    |   |
| Signal level  | 24V / 0V  |
| Physical Layer  | PUSH / PULL                                       |
| Max. counting pulse frequency                               | 200 kHz   |
| Type of connection (X27 / X28)                              | Plug-in terminals with spring or screw connection |
| <b>HTL proximity sensor</b>                                 |   |
| Signal level  | 24V / 0V  |
| Max. counting pulse frequency<br>(circuit logic de-bounced) | 10 kHz  |
| Pulse width   | 50 µsec   |
| Type of connection (X23)                                    | Plug-in terminals with spring or screw connection |
| <b>HTL proximity switch - extended monitoring</b>           |   |
| Signal level  | 24V / 0V  |
| Max. counting frequency<br>(circuit logic de-bounced)       | 4 kHz   |
| Physical Layer  | PUSH / PULL                                       |
| Measuring signal A/B  | Track with 90 degree phase difference             |
| Type of connection (X23)                                    | Plug-in terminals with spring or screw connection |

BBH PRODUCTS GMBH

Böttgerstraße 40  
D- 92637 Weiden

[www.bbh-products.de](http://www.bbh-products.de)

Tel.: + 49 961/4 82 44-0  
Fax: + 49 961/4 82 44-35

[contact@bbh-products.de](mailto:contact@bbh-products.de)

**SAFETY @ ITS BEST!**

# SMX 11-2/2/x

SMXSERIES » Compact » Basic modules

**BBH**  
PRODUCTS

## ORDER INFORMATIONS

### BASIC MODULES

| item                | description   | item no. |
|---------------------|---|----------|
| SMX11-2/2           | Basic module with integrated movement monitoring of one axis + extended encoder functionality | 1688     |
| SMX11-2/2//D        | Basic module + decentralised communication  | 2007     |
| SMX11-2/2/DNM       | Basic module + decentralised communication + Ethernet-based field bus interface + Memory Card | 1676     |
| SMX11-2/2/DNM- FSoE | Basic module + decentralised communication + Ethernet-based field bus interface + Memory Card | 2009     |
| SMX11-2/2/xNM       | Basic module + Ethernet-based field bus interface + Memory Card                               | 1753     |
| SMX11-2/2/xNM-FSoE  | Basic module + Ethernet-based field bus interface + Memory Card                               | 2010     |
| SMX11-2/2/xxM       | Basic module + Memory Card  | 2011     |
| SMX11-2/2/DBM       | Basic module + decentralised communication + CAN-based field bus interface + Memory Card      | 1754     |
| SMX11-2/2/xBM       | Basic module + CAN-based field bus interface + Memory Card                                    | 1755     |

### ACCESSORIES

| item              | description   | item no.   |
|-------------------|---|------------|
| SMX91             | Programming cable SMX   | 1010       |
| SXxxxx-x          | Terminal connector, screw terminals (set), encoded for cabling SMX11-2/2  | on request |
| SXxxxx-x          | Terminal connector, spring terminals (set), encoded for cabling SMX11-2/2 | on request |
| SX0000-9          | T-Bus connector voltage-carrying (grey)                                   | 1015       |
| SXxxxx-x          | Y-cable for encoder splitting   | on request |
| FSoE License      | Field bus license for FSoE  | 2366       |
| PROFIsafe License | Field bus license for PROFIsafe   | 2319       |

### EXTENSIONS

| item       | description                            | item no. |
|------------|--|----------|
| SMX31/2    | I/O expansion module                   | 1705     |
| SMX31R/2   | I/O expansion module with relay option | 2046     |
| SMX31R-4/2 | I/O expansion module with relay option | 2047     |

### SOFTWARE

| item                     | description                                      | item no. |
|--------------------------|--|----------|
| SafePLC <sup>2</sup> 1st | Programming software, 1te License incl. Hardlock | 1244     |
| SafePLC <sup>2</sup> 2nd | Programming software, 2te License incl. Hardlock | 1646     |
| SafePLC <sup>2</sup> 3rd | Programming software, 3te License incl. Hardlock | 1647     |

BBH PRODUCTS GMBH

Böttgerstraße 40  
D- 92637 Weiden

[www.bbh-products.de](http://www.bbh-products.de)

Tel.: + 49 961/4 82 44-0  
Fax: + 49 961/4 82 44-35

[contact@bbh-products.de](mailto:contact@bbh-products.de)

**SAFETY @ ITS BEST!**