



DESCRIPTION

Open programmable compact type safety control

- integrated movement monitoring of one axis
- 3 Encoder interfaces
- 14 Digital inputs
- 2 Relay outputs
- 2/4 pn- or pp- switching outputs
- 2 Auxiliary / pulse outputs
- Safety controller up to PL e acc. to EN ISO 13849-1 or SIL3 acc. to IEC 61508
- optional: safe/non-safe fieldbus interface

CHARACTERISTIC OF THE MODULE

- » Extendable up to:
 - max. 42 safe digital inputs,
 - max. 12 safe digital outputs,
 - max. 20 safe digital I/O's,
 - max. 9 safe relay outputs,
 - max. 10 auxiliary outputs,
 - max. 1 safe axis
- » Logic processing up to PL e acc. to EN ISO 13849-1 or SIL 3 acc. to IEC 61508
- » Movement monitoring for one axis up to PL e acc. to EN ISO 13849-1 or SIL 3 acc. to IEC 61508
- » Speed monitoring:
 - » RPM-monitoring
 - » Standstill monitoring
 - » Sense of rotation monitoring
 - » Safe incremental dimension
 - » Emergency Stop monitoring
 - » Position monitoring
 - » Position range monitoring
 - » Trend range monitoring
 - » Target position monitoring
- » Freely programmable modular controller for up to 800 IL instructions
- » Logic diagram oriented programming via SafePLC²
- » Pulse outputs for cross-shortening detection of digital input signals
- » External contact monitoring of connected switchgear (EMU)
- » Switchable safe semi-conductor outputs pn-, pp- switching for safety-relevant functions

SMX 11/2/x

SMX_{SERIES} » Compact » Basic modules

BBH
PRODUCTS

- » Monitored relay outputs for safety relevant functions
- » Comprehensive diagnostics functions integrated
- » Parameter management for expansion modules in base module
- » Coded status display via front-side 7 segment display and status LEDs
- » Multifunction buttons (quit, start, reset) can be operated from the front side
- » Configurable via SafePLC² über USB serial adapter or Ethernet based field bus
- » Optional: integrated Communication interface :
 - Standard and safe field bus protocols for communication with a higher level controller (PROFIBUS, PROFINET, DeviceNet, CANopen, EtherNET/IP, EtherCAT, Modbus TCP, PROFI-safe, FSoE)
 - Safe cross communication (SMMC) for data exchange between multiple base devices
 - Field bus protocols with the same hardware can be switched with SafePLC²
 - Safe remote I/O communication for data exchange with distributed I/O systems
- » The mechanical structure of SMX11/2 (/x*) is depended on the respective forms of the base module

* *Optional: integrated communication interface (/DNM, /DBM)*

BBH PRODUCTS GMBH

Böttgerstraße 40
D- 92637 Weiden

Tel.: + 49 961/4 82 44-0
Fax: + 49 961/4 82 44-35

www.bbh-products.de

contact@bbh-products.de

SAFETY @ ITS BEST!

SAFETY RELATED CHARACTERISTIC DATA

Performance Level	PL e (EN ISO 13849-1)
PFH / architecture	12,6 FIT / Cat 4
Safety Integrity Level	SIL 3 (IEC 61508)
Proof test interval	20 years = max. operating period

GENERAL DATA

Max. no. of expansion modules	2
Interface for expansion modules	T-bus connector, pluggable in top-hat rail
Number of safe digital inputs	14
Number of safe digital outputs	
	pp-switching ** 4
	pn-switching ** 2
Number of safe digital I/O	–
Number of relay outputs	2
Number of safe analog inputs	–
Number of auxiliary outputs	2
Number of pulse outputs (clock outputs)	2
Type of connection	Plug-in terminals with spring or screw connection
Axis monitoring	1
Encoder interface (D-Sub / Terminals)	1 / 2 *
Encoder technology (See table Encoder specifications)	D-SUB X31: SSI-Absolut, SinCos, Incremental-TTL
	Terminal X23: HTL proximity sensor (10kHz)

* maximum 2 encoder / axis

** pn/pp are configurable via SafePLC²

ELECTRICAL DATA

Supply voltage (tolerance)		24 VDC; 2A (-15%, +20%)
Fuse	X11.1	min. 30 VDC; max. 3,15A
	X11.2	min. 30 VDC; max. 10A
Max. Power consumption (logic)		
	SMX 11/2	3,1 W
	SMX 11/2/x	6,5 W
Rated data digital inputs		24 VDC; 20 mA Typ1 acc. to IEC 61131-2
Rated data digital outputs		
	pn-switching	24 VDC; 2A *
	pp-switching	24 VDC; 2A *
	auxiliary outputs	24 VDC; 250mA
	pulse outputs (clock outputs)	24 VDC; 250mA
Rated data relays		
	Normally open	
	DC 13	24 VDC; 2A
	AC 15	230 VAC; 2A

* see „Derating Outputs“

DERATING OUTPUTS

- » Maximum current load based on temperature
- » The maximum total current is 10A

type of module	outputs	temperature 30°C / 50°C
SMX1x/2/x	Q 1 – Q 4	2A / 1,8A

ENVIRONMENTAL DATA


Temperature	0°C ... +50°C operation -25°C ... +70°C storage and transport
Class of protection	IP 20
Climatic category	3K3 acc. to DIN EN 60721-3
Min-, Maximum relative humidity (no condensation)	5% - 85%
EMC	DIN EN 61000-6-2, DIN EN 61000-6-4, DIN EN 61000-6-7, DIN EN 61800-3, DIN EN 61326-3, DIN EN 62061
Operating altitude	2000m

MECHANICAL DATA

Dimensions (HxDxW [mm])	SMX11/2	100x115x45
	SMX11/2/x *	100x115x67,5
Weight [g]	SMX11/2	310
	SMX11/2/x *	410
Mounting	to snap on top-hat rail	
Number of T-Bus	SMX11/2	2
	SMX11/2/x *	3
Min. terminal cross-section / AWG	0,2 mm ² / 24	
Max. terminal cross-section / AWG	2,5 mm ² / 12	

* Specification, see: „Optional integrated communication interface“

DEVICE INTERFACES

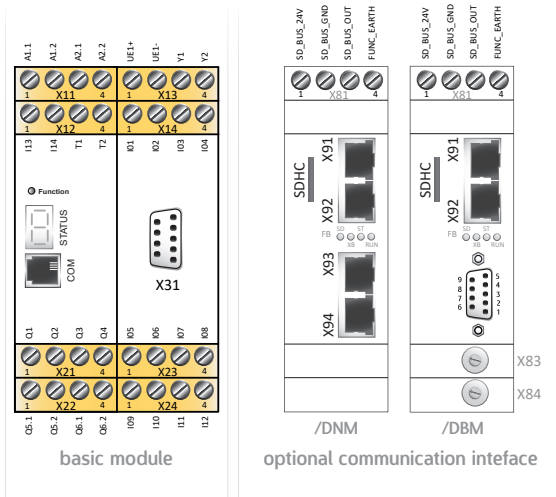

Interface	Description of interface
X11 – X14 / X21 – X24 / X81	Voltage supply and I/O interface
COM	Diagnostic- and configuration interface
X91 / X92	Decentralized SDDC ETH and SMMC interface
X93 / X94	Field bus interfaces
X23 / X31	Encoder interface

VOLTAGE SUPPLY AND I/O INTERFACE

X 11		
Pin	1 - A1.1	Voltage supply device +24 VDC
	2 - A1.2	Voltage supply device +24 VDC outputs
	3 - A2.1	Voltage supply device 0 VDC
	4 - A2.2	Voltage supply device 0 VDC
X 12		
Pin	1 - I13	Safe digital inputs
	2 - I14	
	3 - T1	Clock outputs
	4 - T2	

X 13		
Pin	1 – UE1+	Voltage supply Encoder +24V DC X31
	2 – UE1-	Voltage supply Encoder 0V DC X31
	3 - Y1	Auxiliary outputs
	4 - Y2	
X 14		
Pin	1 - I01	Safe digital inputs
	2 - I02	
	3 - I03	
	4 - I04	

X 21		
Pin	1 - Q1	Output of the pn-switching Q1_PP / pp-switching Q1
	2 - Q2	Output of the pn-switching Q2_PN / pp-switching Q2
	3 - Q3	Output of the pn-switching Q3_PP / pp-switching Q3
	4 - Q4	Output of the pn-switching Q4_PN / pp-switching Q4
X22		
Pin	1 - Q5.1	Safe relay output
	2 - Q5.2	
	3 - Q6.1	Safe relay output
	4 - Q6.2	
X 81 *		
Pin	1 - SD_BUS_24V	Power supply SD-BUS +24 VDC
	2 - SD_BUS_GND	Power supply SD-BUS 0 VDC
	3 - SD_BUS_OUT	SD-BUS Output
	4 - FUNC_EARTH	Functional Earth

* only available for field bus variants

X 23		
Pin	1 - I05	Safe digital inputs
	2 - I06	
	3 - I07	
	4 - I08	
X 24		
Pin	1 - I09	Safe digital inputs
	2 - I10	
	3 - I11	
	4 - I12	

DIAGNOSTIC AND CONFIGURATION INTERFACE

Pin assignment

RJ 10, 4-pin		
Pin	Description	COM front side
1	GND	
2	RS485-	
3	RS485+	
4	VCCH	

» With existing Ethernet-based fieldbus interface, it can be used as a diagnostic and configuration interface.

DECENTRALIZED SDDC ETH AND SMMC INTERFACE

Pin assignment female connector

Communication interface (RJ45-Buchse)				Front side
Pin	Name	Description	Colour	X91 / X92
1	TX+	Transmit Data +	white-orange	
2	TX-	Transmit Data -	orange	
3	RX+	Receive Data +	white-green	
4	nc	not used	blue	
5	nc	not used	white-blue	
6	RX-	Receive Data -	green	
7	nc	not used	white-brown	
8	nc	not used	brown	

Safe Master – Master Communication (SMMC)

SMMC communication enable a secure data exchange of 2 bytes between multiple SDDC masters. Communication takes place without a master for coordinating the data. This means that data exchange between available subscribers is always possible. This principle means that an incomplete or separates network can work in part areas without chnaging the configuration.

Each port can be configured in the SafePLC².

FIELDBUS INTERFACES

Pin assignment female connector

Ethernet-based fieldbus interface /xNx (RJ45)				Front side
Pin	Name	Description	Colour	X93 / X94
1	TX+	Transmit Data +	white-orange	
2	TX-	Transmit Data -	orange	
3	RX+	Receive Data +	white-green	
4	nc	not used	blue	
5	nc	not used	white-blue	
6	RX-	Receive Data -	green	
7	nc	not used	white-brown	
8	nc	not used	brown	

CAN-based fieldbus interface /DBM, /xBM (D-Sub)				Front side
Pin	CANopen	PROFIBUS	DeviceNet	
1	—	—	V-	
2	CAN_L	—	CAN_H	
3	isoGND	RXD/TXD-P (B)	DRAIN	
4	—	CNTR-P	CAN_L	
5	—	GND	V+	
6	—	VP (+5V)	—	
7	CAN_H	—	—	
8	—	RXD/TXD-N (A)	—	
9	—	CNTR-N	—	

OPTIONAL INTEGRATED COMMUNICATION INTERFACE

- » Subsequent expansion capability of standard to safe field bus via additional Mini SD card on the back of the module is possible (/xNx und /xBx)
- » Different specifications can be combined

General data

Decentralized communication interface	
/D	2x RJ 45 *
Fieldbus interface	
/xN	2x RJ 45 **
/xB	1x Sub-D ***
Memory Card (safety program)	
/xxM	1x Mini SD (front side)
Memory Card (license for safe field bus)	
/xNx	1x Mini SD (rear side)
/xBx	
SD bus	plug-in terminals
status LEDs	4
Field bus address rotary switch	
/xBx	2

* optional for SDDC or SMMC

** available field buses PROFINET, EtherCAT, Modbus TCP and Ethernet TCP/IP

*** available field buses PROFIBUS, CANopen und DeviceNet

Combination options

	/D	/DNM	/xNM	/xxM	/DBM	/xBM
--	----	------	------	------	------	------

Field bus protocols	/DBM	/xBM	/DNM	/xNM
PROFIBUS	X	X		
DeviceNet	X	X		
CANopen	X	X		
PROFINET			X	X
Ethernet IP			X	X
EtherCAT			X	X
Modbus TCP			X	X
PROFIsafe *	X	X	X	X
FSoE *			X	X

* Specification required in your order

» The CAN-based and Ethernet-based fieldbus interfaces can be switched via the SafePLC² between the fieldbus protocols

ENCODER INTERFACES

Pin assignment X31

Pin	Inc / Sin/Cos / SSI	Front side SMX
1	n.c.	
2	GND	
3	n.c.	
4	B / COS - / Clk -	
5	A + / SIN + / Data +	
6	A - / SIN - / Data -	
7	n.c.	
8	B + / COS + / Clk +	
9	VCC +	

Pin assignment X23

Pin	Z1 - Z1 / Z2 - Z2	Terminal
1	A (\bar{A}) / A (\bar{A})	
2	-- / B (\bar{B})	
3	A (\bar{A}) / A (\bar{A})	
4	-- / B (\bar{B})	

ENCODERSPECIFICATIONS

Incremental - TTL

Physical Layer	RS-422 compatible
Measuring signal A/B	Track with 90 degree phase difference
Type of connection	D-SUB 9 pole
Max. frequency of input cycles (X31)	200 kHz

Sin/Cos

Physical Layer	RS-422 compatible
Measuring signal A/B	Track with 90 degree phase difference
Type of connection	D-SUB 9pole
Standard Mode	
Max. frequency of input clock pulses (X31)	200 kHz

SSI-Absolut

Data interface	Serial Synchronous Interface (SSI) with variable data length of 12 – 28 Bit
Data format	Binary, Gray code
Physical Layer	RS-422 compatible
Type of connection	D-SUB 9-pole
Mode	Master or Listener
SSI-Master operation	
Clock rate	150 kHz
SSI-Listener operation	
Clock rate (X31)	100 kHz ... 200 kHz

SMX 11/2/x

SMXSERIES » Compact » Basic modules

BBH
PRODUCTS

Min. clock pause time	150 µsec
Max. clock pause time	1 msec

HTL proximity sensor

Signal level	24V / 0V
Max. counting pulse frequency (circuit logic de-bounced)	10 kHz
Pulse width	50 µsec
Type of connection (X23)	Plug-in terminals with spring or screw connection

HTL proximity switch - extended monitoring

Signal level	24V / 0V
Max. counting frequency (circuit logic de-bounced)	4 kHz
Physical Layer	PUSH / PULL
Measuring signal A/B	Track with 90 degree phase difference
Type of connection (X23)	Plug-in terminals with spring or screw connection

ORDER INFORMATIONS

BASIC MODULES

item	description	item no.
SMX11/2	Basic module with integrated movement monitoring of one axis	2001
SMX11/2/D	Basic module + decentralized communication	2002
SMX11/2/DNM	Basic module + decentralized communication + Ethernet-based field bus interface + Memory Card	1749
SMX11/2/DNM- FSoE	Basic module + decentralized communication + Ethernet-based field bus interface + Memory Card	2004
SMX11/2/xNM	Basic module + Ethernet-based field bus interface + Memory Card	1750
SMX11/2/xNM-FSoE	Basic module + Ethernet-based field bus interface + Memory Card	2005
SMX11/2/xxM	Basic module + Memory Card	2006
SMX11/2/DBM	Basic module + decentralized communication + CAN-based field bus interface + Memory Card	1751
SMX11/2/xBM	Basic module + CAN-based field bus interface + Memory Card	1752

ACCESSORIES

item	description	item no.
SMX91	Programming adapter	1010
SXxxx-x	Terminal connector, screw terminals (set), encoded for cabling SMX11/2	on request
SXxxx-x	Terminal connector, spring terminals (set), encoded for cabling SMX11/2	on request
SX0000-9	T-Bus connector voltage-carrying (grey)	1015
SXxxx-x	Y-cable for encoder splitting	on request
FSoE License	Field bus license for FSoE	2366
PROFIsafe License	Field bus license for PROFIsafe	2319

EXTENSIONS

item	description	item no.
SMX31/2	I/O expansion module	1705
SMX31R/2	I/O expansion module with relay option	2046
SMX31R-4/2	I/O expansion module with relay option	2047

SOFTWARE

item	description	item no.
SafePLC ² 1st	Programming software, 1te License incl. Hardlock	1244
SafePLC ² 2nd	Programming software, 2te License incl. Hardlock	1646
SafePLC ² 3rd	Programming software, 3te License incl. Hardlock	1647