

SMX 31/2

SMXSERIES » Compact » Central expansion » I/O module

BBH
PRODUCTS



DESCRIPTION

Digital I/O-Expansion module for the SMXCOMPACT - Basic modules

- 12 Safe digital inputs
- 10 Digital I/Os
- 2 Auxiliary / pulse outputs
- Safety controller up to PL e acc. to EN ISO 13849-1 or SIL3 acc. to IEC 61508

CHARACTERISTICS OF THE MODULE

- » Pulse outputs for cross-shortening detection of digital input signals
- » External contact monitoring of connected switchgear (EMU)
- » Comprehensive diagnostics functions integrated
- » Assembly on top hat rail

BBH PRODUCTS GMBH

Böttgerstraße 40
D- 92637 Weiden

www.bbh-products.de

Tel.: + 49 961/4 82 44-0
Fax: + 49 961/4 82 44-35

contact@bbh-products.de

SAFETY @ ITS BEST!

SAFETY RELATED CHARACTERISTIC DATA

Performance Level	PL e (EN ISO 13849-1)
PFH / architecture	9,2 FIT / Cat 4 ¹⁾
Safety Integrity Level	SIL 3 (IEC 61508)
Proof test interval	20 years = max. operating period

GENERAL DATA

Max. no. of expansion modules	-
Interface for expansion modules	T-bus connector, pluggable in top-hat rail
Number of safe digital inputs	12
Number of safe digital outputs	-
pp-switching **	-
pn-switching **	-
Number of safe digital I/O	10
Number of relay outputs	-
Number of safe analogue inputs	-
Number of auxiliary outputs	2
Number of pulse outputs (clock outputs)	2
Type of connection	Plug-in terminals with spring or screw connection
Axis monitoring	-/-
Encoder interfaces (D-Sub / screw terminals)	-/-

** pn/pp are configurable via SafePLC²

¹⁾ Value applies only for extension module

For a total assessment in accordance with EN ISO 13849-1 one must use a series connection with the corresponding basic device

$$\triangleright PFH_{logic} = PFH_{Basic} + PFH_{Extension}$$

ELECTRICAL DATA

Fuse	X11.1	min. 30 VDC; max. 10A
Max. Power consumption (logic)	SMX31/2	7,1 W
Rated data digital inputs		24 VDC; 20 mA, Typ1 nach IEC 61131-2
Rated data digital outputs		
	auxiliary outputs	24 VDC; 250mA
	pulse outputs (clock outputs)	24 VDC; 250mA
	digital I/O	01 - 05 06 - 10
		24 VDC; 0,5A 24 VDC; 2A *
Rated data relays		
	Normally open	DC 13 AC 15
		24 VDC; 2A 230 VAC; 2A
	Normalay closed (read back contact)	DC 13
		24 VDC; 2A

* See „Derating outputs“

DERATING OUTPUTS

- » Maximum current load based on temperature.
- » The maximum total current is 10A.

type of module	outputs	temperature 30°C / 50°C
SMX31/2/x	IQ 6 – IQ 10	2A / 1,8A

SMX 31/2

SMXSERIES » Compact » Central expansion » I/O module

BBH
PRODUCTS

ENVIRONMENTAL DATA

Temperature	0°C ... +50°C operation
	-25°C ... +70°C storage and transport
Class of protection	IP 20
Climatic category	3K3 acc. to DIN EN 60721-3
Min-, Maximum relative humidity (no condensation)	5% - 85%
EMC	DIN EN 61000-6-2, DIN EN 61000-6-4, DIN EN 61000-6-7, DIN EN 61800-3, DIN EN 61326-3, DIN EN 62061
Operating altitude	2000m

MECHANICAL DATA

Dimension (HxDxW [mm])	SMX31/2	100x115x45
Weight [g]	SMX31/2	300
Mounting		to snap on top-hat rail
Number of T-Bus		
	SMX31/2	2
Min. terminal cross-section / AWG		0,2 mm ² / 24
Max. terminal cross-section / AWG		2,5 mm ² / 12

BBH PRODUCTS GMBH

Böttgerstraße 40
D- 92637 Weiden


www.bbh-products.de

Tel.: + 49 961/4 82 44-0
Fax: + 49 961/4 82 44-35

contact@bbh-products.de

SAFETY @ ITS BEST!

DEVICE INTERFACES

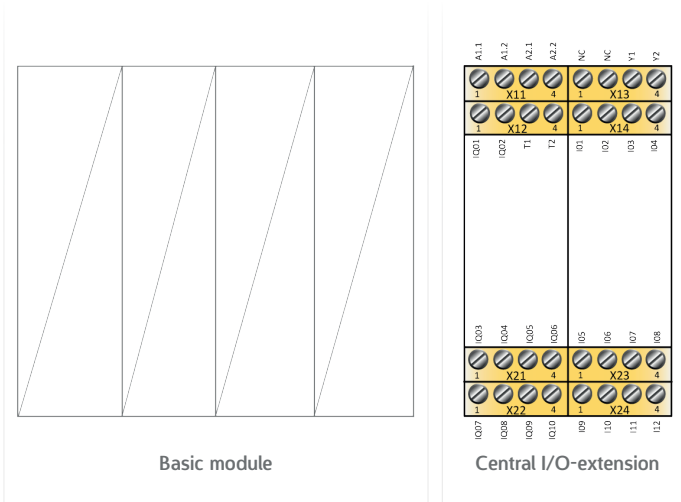

Interface	Description of interface
X11 – X14 / X21 – X24	Voltage supply and I/O interface

VOLTAGE SUPPLY AND I/O INTERFACE

X 11		
Pin	1 - A1.1	Voltage supply device +24 VDC outputs
	2 - A1.2	
	3 - A2.1	Voltage supply device 0 VDC
	4 - A2.2	
X 12		
Pin	1 - IQ01	Safe digital inputs, outputs pp-switching
	2 - IQ02	
	3 - T1	Clock outputs
	4 - T2	
X 13		
Pin	1 - NC	No function
	2 - NC	
	3 - Y1	Auxiliary outputs
	4 - Y2	
X 14		
Pin	1 - I01	Safe digital inputs
	2 - I02	
	3 - I03	
	4 - I04	

X 21		
Pin	1 - IQ 03	Safe digital inputs, outputs pp-switching
	2 - IQ 04	
	3 - IQ 05	
	4 - IQ 06	
X 22		
Pin	1 - IQ 07	Safe digital inputs, outputs pp-switching
	2 - IQ 08	
	3 - IQ 09	
	4 - IQ 10	
X 23		
Pin	1 - I05	Safe digital inputs
	2 - I06	
	3 - I07	
	4 - I08	
X24		
Pin	1 - I09	Safe digital inputs
	2 - I10	
	3 - I11	
	4 - I12	

SMX 31/2

SMX_{SERIES} » Compact » Central expansion » I/O module



ORDER INFORMATION

EXTENTIONS

item	description	item no.
SMX 31/2	I/O expansion module	1705

ACCESSORIES

item	description	item no.
SX _{xxxx-x}	Terminal connector, screw terminals (set), encoded for cabling SMX31/2	on request
SX0011-1	Terminal connector, spring terminals (set), encoded for cabling SMX31/2	1516
SX0000-9	T-Bus connector, voltage-carrying (grey)	1015

BBH PRODUCTS G_MBH

Böttgerstraße 40
D- 92637 Weiden

Tel.: + 49 961/4 82 44-0
Fax: + 49 961/4 82 44-35

www.bbh-products.de

contact@bbh-products.de

SAFETY @ ITS BEST!