



## AMP Superseal 1.5 2-pin/3-pin

### Product characteristics

- Suitable for ultrasonic sensor 2UF and angle sensor 424A

### Technical drawing

IMAGE 1/3

L0.C00.B01


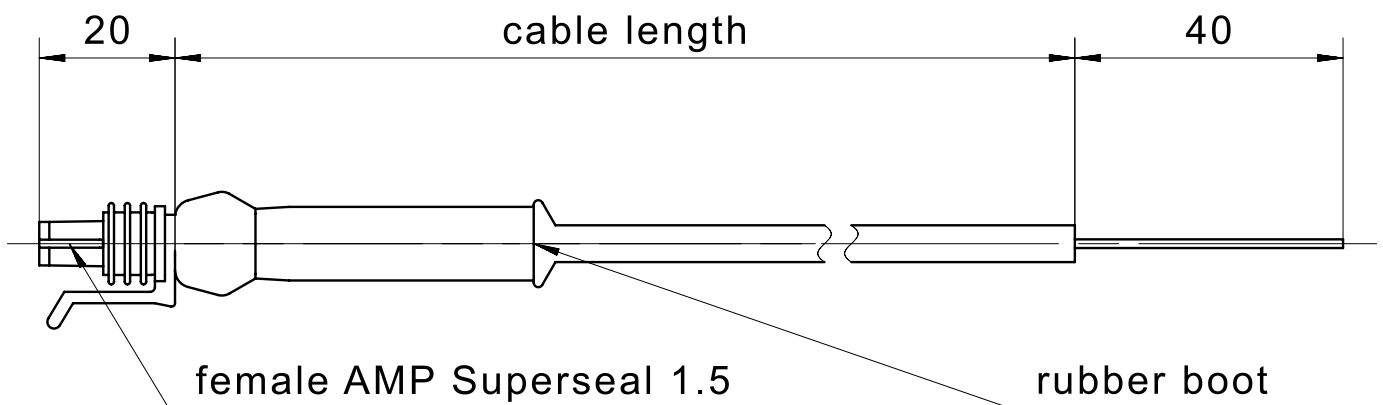


IMAGE 2/3

**L0BC00.B01**

female AMP  
Superseal 1.5

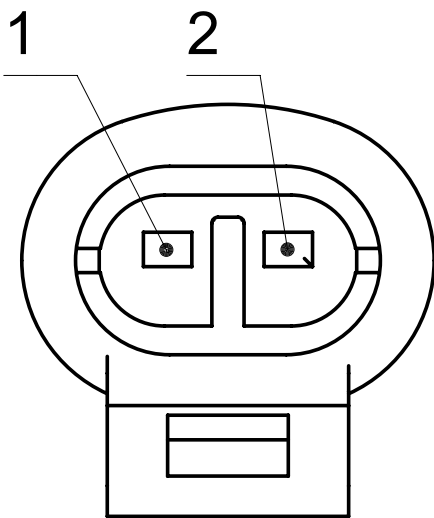

**L0CC00.B01**

female AMP  
Superseal 1.5

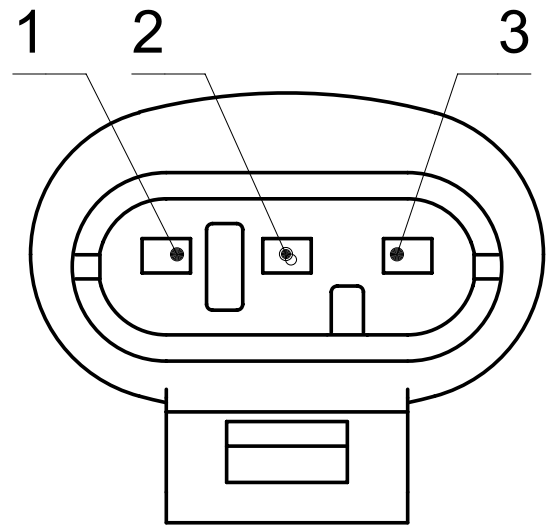


IMAGE 3/3

**L0BC00.B01**

1 ) ————— BU

2 ) ————— BN

**L0CC00.B01**

1 ) ————— BU

2 ) ————— BN

3 ) ————— BK

**Product options**

IMAGE 1/1

**ORDERING KEY**

AMP Superseal 1.5		
L0	B	Sheath material PVC, grey, 2-pin
	C	Sheath material PVC, grey, 3-pin
	C001B01	Cable length 1m ± 30mm
	C003B01	Cable length 3m ± 40mm
	C005B01	Cable length 5m ± 60mm
	C000B01	Cable length 10m ± 80mm
		Other cable materials and cable lengths on request

**Article characteristics**

Attribute	LOBC...B01	LOCC...B01
Cable material	PVC	
Operating temperature min.	-25 °C	
Max. operating temperature	70 °C	
Min. storage temperature	-25 °C	
Max. storage temperature	70 °C	
Connector type	AMP Superseal socket	
Cable diameter	5,7 +/-0,1 mm	5,5 +/-0,2 mm
Number of pins	2	3
Number of strands	2	3
Wire cross section	0.5 mm <sup>2</sup>	
Cable length	Selectable (1m, 3m, 5m, 10m)	