

AMPLIFIER



Series OA 721


The OA 721 is applicable with all transmitters/ receivers operating with separate amplifiers.

- 11-pin plug-in module
- LED indication of amplifier activation
- Relay output

Technical data

Supply options:	230V, 115V, 024VAC, $\pm 10\%$ 45-65Hz 024V, 012VAC/DC +15% -20%
Power consumption:	approx. 2,8VA
Output:	single pole changeover 250VAC, 8A
Modulation Frequency:	approx. 7,5KHz
Response time:	Typ. 25msec.
Ambient temperature:	- 20°C to + 55°C
Housing:	11-pin plug-in Noryl
Gain control:	Allows 10:1 change
Weight:	max 190 g

Wiring diagram

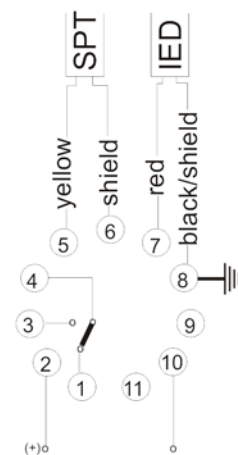

Type no. Identification code

Type no.	Identification code
010000	OA 721 230VAC relay output
010010	OA 721 115VAC relay output
010020	OA 721 048VAC relay output
010040	OA 721 024VAC relay output
010050	OA 721 024VAC/DC relay output
010070	OA 721 012VAC/DC relay output

Dimension (mm)

