

AMPLIFIER



Series OA 722

The OA 722 is applicable with all transmitters/ receivers operating with separate amplifiers.

- 11-pin plug-in module
- LED indication of amplifier activation
- Relay and transistor output NPN or PNP
- Light/dark function
- Output invertible
- Eliminates fault pulses

Technical data

Supply options: 230V, 115V, 024VAC, $\pm 10\%$ 45-65Hz
024V, 012VAC/DC +15% -20%

Power consumption: approx. 2,8VA

Output: -Relay: single pole changeover 250VAC, 8A
-Solid state: NPN or PNP 50mA 30VDC

Modulation Frequency: approx. 7,5KHz

Response time: Typ. 25msec.


Ambient temperature: - 20 °C to + 55 °C

Housing: 11-pin plug-in Noryl

Gain control: Allows 10:1 change

Weight: max 190 g

Wiring diagram

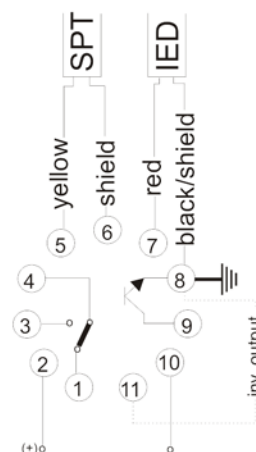

Type no. Identification code

011200	OA 722 230VAC relay and NPN output
011210	OA 722 115VAC relay and NPN output
011220	OA 722 048VAC relay and NPN output
011240	OA 722 024VAC relay and NPN output
011250	OA 722 024VAC/DC relay and NPN output
011270	OA 722 012VAC/DC relay and NPN output

011200NP	OA 722NP 230VAC PNP and NPN output
011210NP	OA 722NP 115VAC PNP and NPN output
011220NP	OA 722NP 048VAC PNP and NPN output
011240NP	OA 722NP 024VAC PNP and NPN output
011250NP	OA 722NP 024VAC/DC PNP and NPN output
011270NP	OA 722NP 012VAC/DC PNP and NPN output

Dimension (mm)

