


[Article Page](#)

Product Description

Touch Sensor

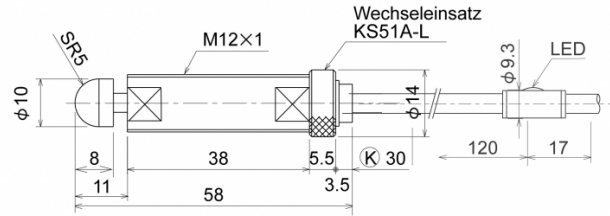


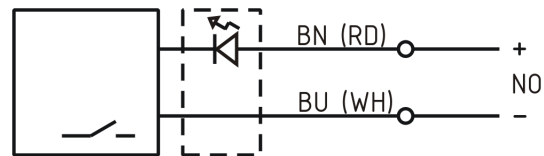
Ⓚ Platz wird benötigt zum Wechsel des Einsatzes

Name
Order number
Switch type

CSH121A-AL
08430121001

Signal Type
Connection
Connection diagramm

 N.O.
mechanical contact
Cable 2m



Dimension (in mm)
art_gewicht
Technical Specification
Operating voltage
Max. load current
Switching hysteresis
Operating temperature
Temperature drift
Repeat accuracy

fine-pitch thread M12x1 x l = 59,5
69 g

Switching state
Stroke
Pre-travel
Accuracy
Probe tip
Probe tip material
Operation load
art_ttl_mech
Protection category
Wiring
Housing material
Termination
Approach direction

5 - 24 V DC
10 mA
0
0 ° C to 80 ° C
0
0,005 mm (at operating speed 50 ... 200 mm/
min)
LED
2,8 mm
0,3 mm
0,005 mm
Halbkugel/ hemisphere Ø 10
Edelstahl / Stainless steel
1,5 N
10 Mio. operating cycles
IP65
Zweidraht/ Two wire
Stainless steel V2A
cable 2 m, 2 wire, Ø 4 mm, oil resistant
axial or lateral

Errors and omissions exceptet