



Name
Order number
Switch type

CSJ055A-L
08430131000


Signal Type
Connection

 N.O.
mechanical contact

Connection diagramm

 Cable

Dimension (in mm)
art_gewicht
Technical Specification
Operating voltage
Max. load current
Switching hysteresis
Operating temperature
Temperature drift
Repeat accuracy

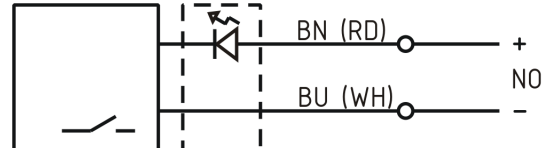

fine-pitch thread M5x0,5 x l = 42
48 g

Switching state
Stroke
Pre-travel
Accuracy
Probe tip
Probe tip material
Operation load
art_ttl_mech
Protection category
Wiring
Housing material
Termination
Approach direction

5 - 24 V
10 mA
0
0 ° C to 80 ° C
0
0,005 mm (at operating speed 50 ... 200 mm/
min)
LED
2 mm
0,3 mm
0,005 mm
Zylinder 2/R 1,5
Edelstahl
1 N
10 Mio. operating cycles
IP65
Zweidraht/ Two wire
Stainless steel V2A
3m cable 2 wire
axial

Errors and omissions excepted