

Datasheet

020SMQV

Knob selector switch, green, 4-position, Cam Q





Features

| | |
|-----------------------|--|
| Range | Non-illuminated knob selector switches Ø 22 |
| components | 4-position |
| Code | 020SMQV |
| Description | Knob selector switch, green, 4-position, Cam Q |
| Colour | Verde |
| Weight - gr | 27.4 |
| Customs Tariff | 85365080 |
| GTIN | 8052878016593 |

Datasheet

| | |
|--|--|
| Approvals | CE, UL, CSA |
| Compliance with standards | IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2 |
| Compliance with standards | UNI CEI EN 45545-2, CEI EN 61373 |
| Operating temperatures | -40° ÷ +70°C |
| Environmental operating values | +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30) |
| Protection degree | IP66 - IP69 (IEC-EN60529) |
| Protection against impact | IK06 (IEC-EN62262) |
| Mechanical durability | 1.000.000 Operations |
| Shock resistance | 30g duration=18ms (EN-IEC 60068-2-27) |
| Shock resistance | 50g duration=11ms (EN-IEC 60068-2-27) |
| Vibration resistance | 5g f= 2...500Hz (EN-IEC 60068-2-6) |
| Contact blocks configuration | Max no. 8 blocks (4+4) |
| Material | PA Polyamide |
| Locking ring material | Zamak zinc alloy |
| Fixing diameter | 22.5mm - Thickness 1÷6mm |
| Tightening torque | 2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in) |
| Protection against electric shock | Class II (IEC-EN61140) |
| Warranty period | 18 months |



Technical drawings

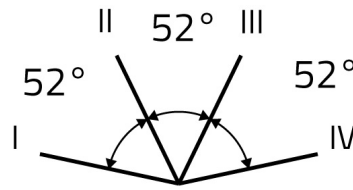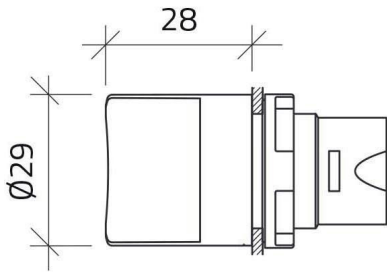

CAM Q



| I | II | III | IV | |
|---|----|-----|----|-----|
| | | ■ | | E10 |
| | ■ | | | E10 |
| ■ | | | | E01 |
| | | | ■ | E01 |



020E10
020E10
020E01
020E01
020G

