



acoustic sensor

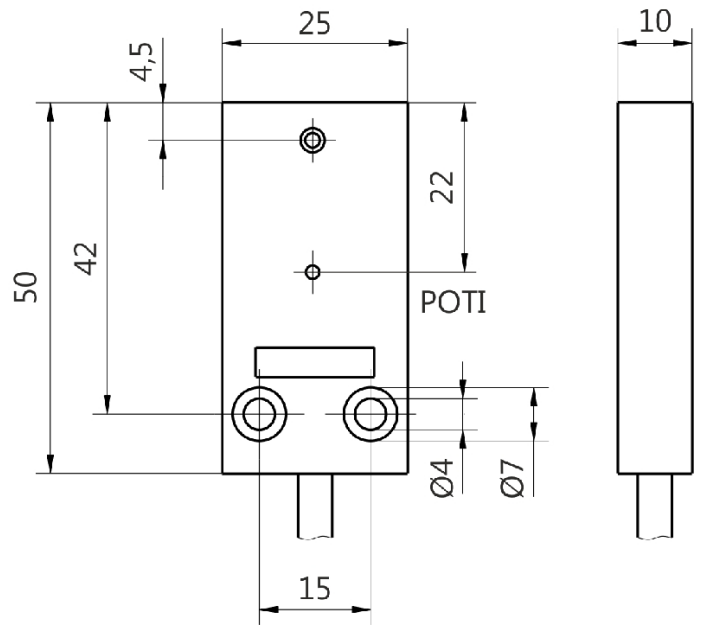

Name
Order number
Mounting


KA1-Q25KB-DPÖ
08340001010

 non shielded


Switch type

 N.C.
DC PNP

Signal Type
Connection

 Cable

Connection diagramm

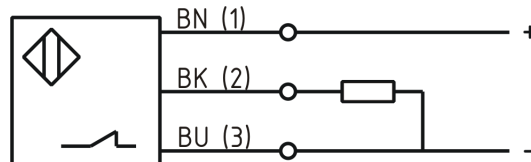

Dimension (in mm)

Q 25 x 10 x 50
70

art_gewicht

Technical Specification

Operating voltage

10 - 30 V DC

Max. ripple

≤ 10 %

Voltage drop

1,5 V

No load current

≤ 10 mA

Operating temperature

-25 ° C to 85 ° C

Temperature drift

≤ 10 %

Sensitivity adjustable

ja - Poti

Short-circuit proof

yes

Overload protection

yes

Reverse voltage protection

yes

Protection category

IP 67

EMC-level

DIN EN 60947-5-2: 2008

Housing material

PA 6.6

Rated operating current at 40° C

16 mA

Rated operating voltage

24 V DC

Cable length

2 m

Utilisation category

DC 13



KA1-Q25KB-DPÖ

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Cable material
Cable cross

PVC LIYY grau
3x0.34mm²

Errors and omissions exceptet