
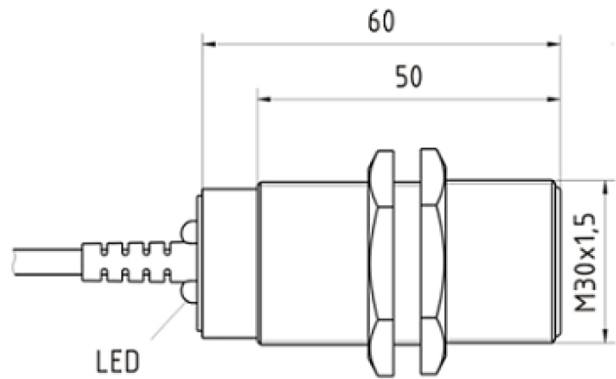


[Article Page](#)


Product Description

inductive sensor AC

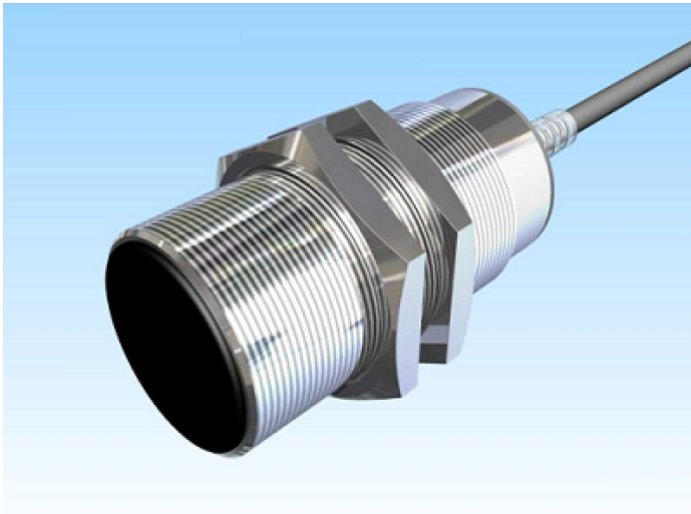


Name
Order number
Matchcode
Switching distance
Mounting


KJ10-M30MB60-AZS
08317162600
9916-2600
10 mm

 shielded


Switch type

 N.O.
AC

Signal Type
Connection

 Cable

Connection diagramm

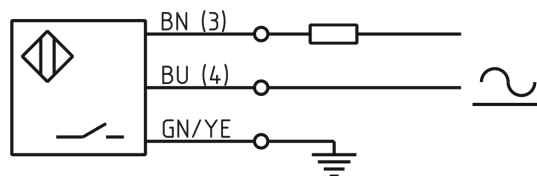

fine-pitch thread M30 x 60

Dimension (in mm)
Technical Specification
Operating voltage
Voltage drop
Max. load current
Leakage current
Switching frequency
Switching hysteresis
Operating temperature
Temperature drift
Repeat accuracy
Switching state
Short-circuit proof
Overload protection
Reverse voltage protection
Protection category
EMC-level
Material active face
Termination

20 - 250 VAC
5 V
300 mA
≤ 2 mA
15
≤ 15 %
-25 ° C to 70 ° C
≤ 10 %
≤ 5 %
LED
yes
yes
yes
IP67
DIN EN 60947-5-2:2008
PCB
2m PVC 3x0,5mm²



KJ10-M30MB60-AZS

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Errors and omissions exceptet