
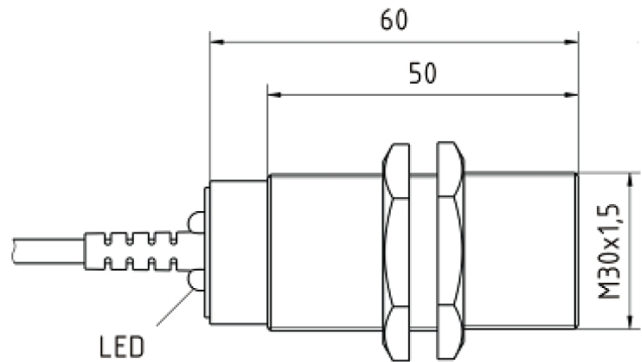


[Article Page](#)


Product Description


inductive sensor AC/DC

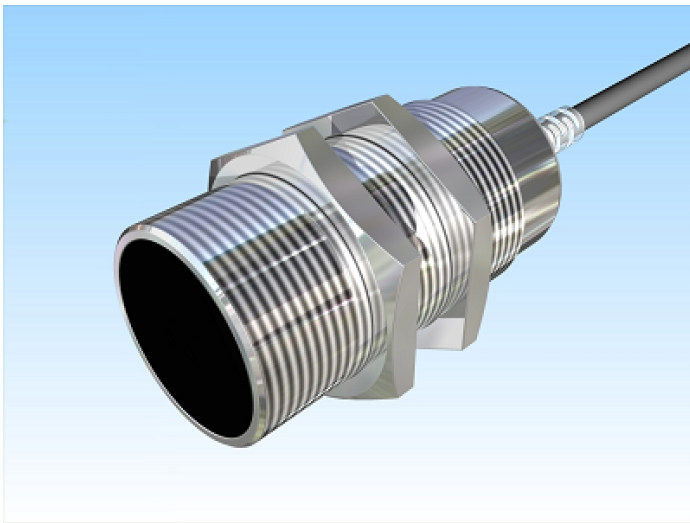



Name  
Order number  
Switching distance  
Mounting  
  
Switch type  
  
Signal Type  
Connection  
  
Connection diagramm

KJ10-M30MB60-VZS  
08317171200  
10 mm

 shielded

 N.O.  
AC/DC

 Cable

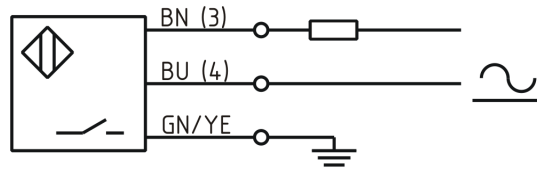

fine-pitch thread M30 x 60

Dimension (in mm)  
Technical Specification  
Operating voltage  
Voltage drop  
Max. load current  
Leakage current  
Switching frequency  
Switching hysteresis  
Operating temperature  
Temperature drift  
Repeat accuracy  
Switching state  
Short-circuit proof  
Overload protection  
Reverse voltage protection  
Protection category  
EMC-level  
Material active face  
Termination  
Notes

20 - 250 V AC/DC  
5 V  
350 mA  
≤ 1,7 mA  
30  
≤ 15 %  
-25 ° C to 70 ° C  
≤ 10 %  
≤ 5 %

LED  
yes  
yes  
yes  
IP67  
DIN EN 60947-5-2:2008  
PCB  
2m PVC 3x0,5mm<sup>2</sup>  
Kurzschluss- und Überlastungsschutz rastend. Nach Beseitigung des Kurzschlusses muß die Spannungsversorgung für ca. 2s unterbrochen



## **KJ10-M30MB60-VZS**

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

werden.

**Errors and omissions exceptet**