

[Article Page](#)

Product Description  
 Name  
 Order number  
 Switching distance  
 Mounting


inductive sensor DC  
 KJ3-G6,5MB60-DPÖ-V1  
 08313036521  
 3 mm



Switch type

N.C.  
 DC PNP  
 connector M8

Signal Type  
 Connection  
 Connection diagramm

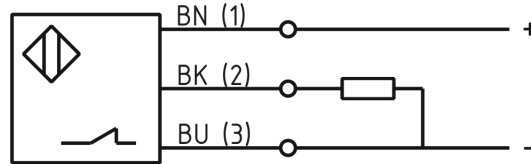

D 6,5 x 60

Dimension (in mm)  
 Technical Specification  
 Operating voltage  
 Max. ripple  
 Voltage drop  
 Max. load current  
 No load current  
 Leakage current  
 Switching frequency  
 Switching hysteresis  
 Operating temperature  
 Temperature drift  
 Repeat accuracy  
 Switching state  
 Short-circuit proof  
 Overload protection  
 Reverse voltage protection  
 Protection category  
 EMC-level  
 Housing material  
 Material active face  
 Utilisation category  
 Termination

10 - 30 VDC  
 ≤ 10 %  
 1 V  
 200 mA  
 ≤ 10 mA  
 ≤ 10 µA  
 1000  
 ≤ 15 %  
 -25 ° C to 70 ° C  
 ≤ 10 %  
 < 2 %  
 LED  
 yes  
 yes  
 yes  
 IP67  
 DIN EN 60947-5-2: 2008  
 Brass, nickel plated  
 POM  
 DC 13  
 Connector M8 3pin

**Errors and omissions exceptet**