
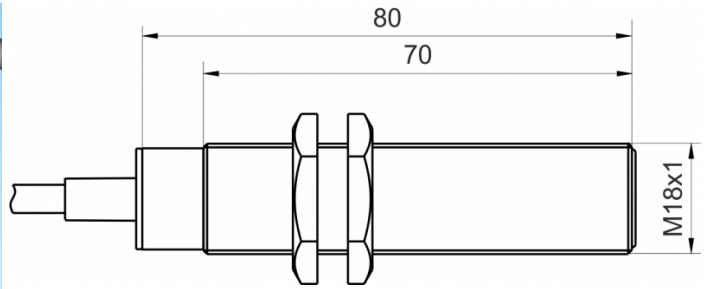


[Article Page](#)

Product Description


inductive sensor analogue

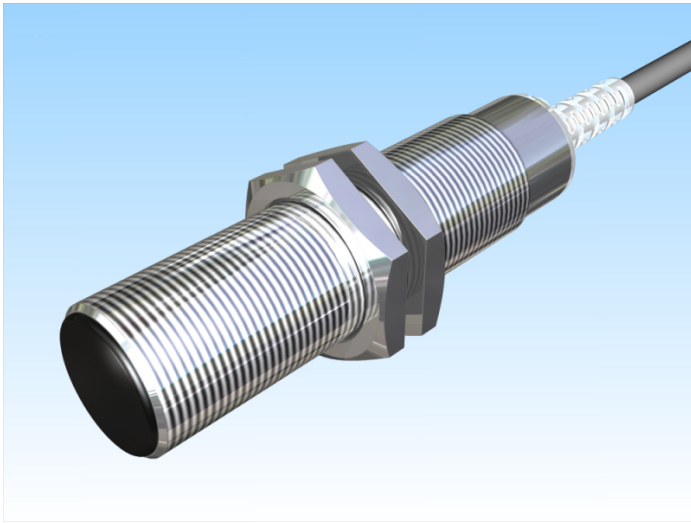

Name
Order number
Matchcode
Switching distance
Mounting

KJ4-M18MB80-ANU
08317140900
9914-0900
from 1 mm to 4 mm

Switch type


 shielded

Signal Type
Connection

 analog
Analog Voltage

Connection diagramm

 Cable

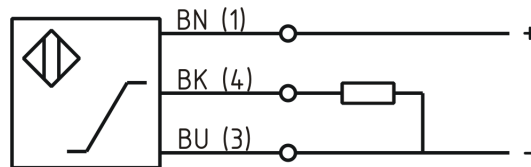

fine-pitch thread M18 x 80

Dimension (in mm)
Technical Specification
Special features
Operating voltage
Max. ripple
No load current
Switching frequency
Operating temperature
Temperature drift
Repeat accuracy
Linearity
Analog output
Time delay
Resolution
Reverse voltage protection
Protection category
EMC-level
Housing material
Material active face
Rated operating current at 40° C
Rated operating voltage

Output Voltage 1 ... 9 Volt
18 - 30 VDC
≤ 10 %
≤ 10 mA
100 Hz
-25 ° C to 70 ° C
+/- 8 %
≤ 1 %
≤ 3%
Pulso_has1
300 ms
2,67 V / mm
yes
IP67
DIN EN 60947-5-7:2004-06
Brass, nickel plated
PCB
< 10 mA



KJ4-M18MB80-ANU

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Cable length	2 m
Utilisation category	DC 13
Cable material	PVC LIYCY grau (grey)
Nominal operating voltage	24 V DC
Cable cross	3x0.14 mm ²
interanl Load	