
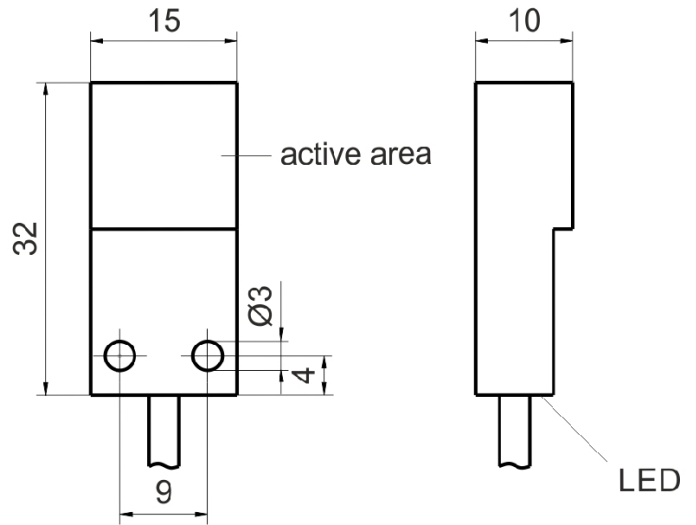


[Article Page](#)


Product Description

inductive sensor DC

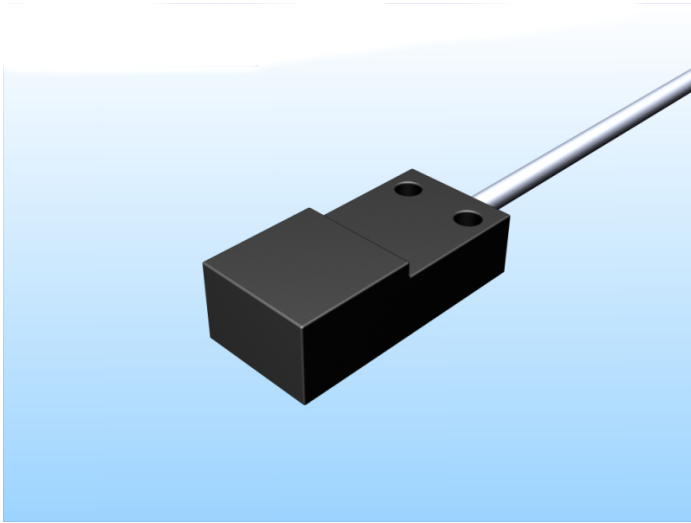

Name  
Order number  
Switching distance  
Mounting


KJ4-Q15KN32-DPÖ  
08313150420  
4 mm

 non shielded


Switch type

 N.C.  
DC PNP

Signal Type  
Connection

 Cable

Connection diagramm

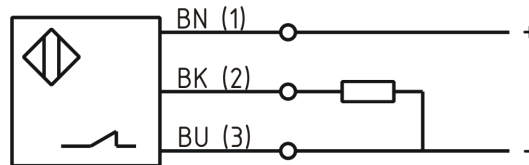

Dimension (in mm)  
Technical Specification

Q 15 x 8 x 32

Operating voltage  
Max. ripple  
Voltage drop  
Max. load current  
No load current  
Leakage current  
Switching frequency  
Switching hysteresis  
Operating temperature  
Temperature drift  
Repeat accuracy  
Switching state  
Short-circuit proof  
Overload protection  
Reverse voltage protection  
Protection category  
EMC-level  
Cable length  
Utilisation category  
Cable material

10 - 30 V DC  
≤ 10 %  
1 V  
100 mA  
≤ 10 mA  
≤ 10 µA  
250  
≤ 15 %  
-25 ° C to 70 ° C  
≤ 10 %  
≤ 3 %  
LED  
yes  
yes  
yes  
IP67  
DIN EN 60947-5-2: 2008  
2 m  
DC 13  
PVC grau LIYY



## KJ4-Q15KN32-DPÖ

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Cable cross

3x0.14 mm<sup>2</sup>

**Errors and omissions exceptet**