
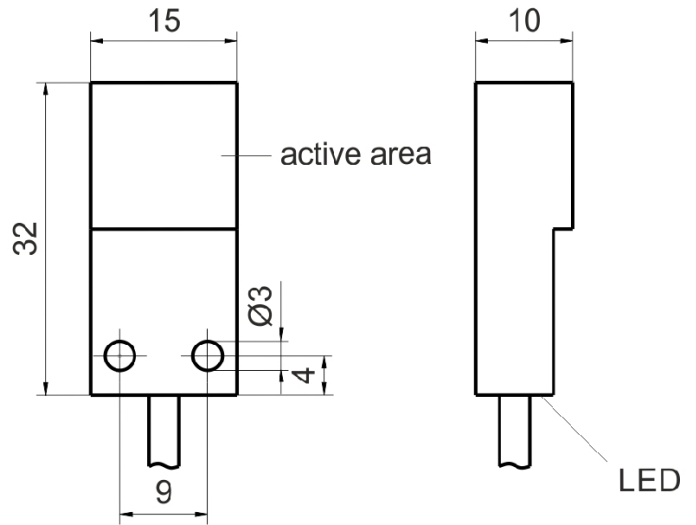


[Article Page](#)


Product Description

inductive sensor DC

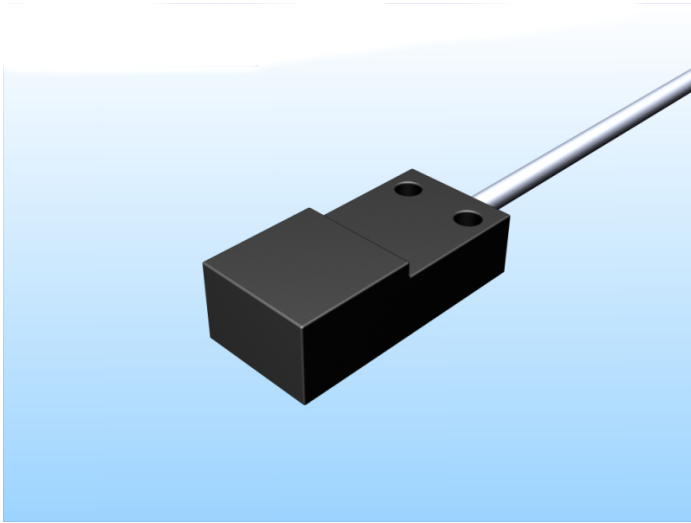


Name
Order number
Switching distance
Mounting


KJ4-Q15KN32-DPS
08313150410
4 mm

 non shielded


Switch type

 N.O.
DC PNP

Signal Type
Connection

 Cable

Connection diagramm

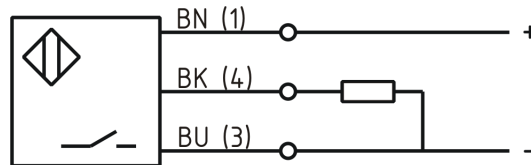

Dimension (in mm)
Technical Specification

Q 15 x 8 x 32

Operating voltage
Max. ripple
Voltage drop
Max. load current
No load current
Leakage current
Switching frequency
Switching hysteresis
Operating temperature
Temperature drift
Repeat accuracy
Switching state
Short-circuit proof
Overload protection
Reverse voltage protection
Protection category
EMC-level
Cable length
Utilisation category
Cable material

10 - 30 V DC
≤ 10 %
1 V
100 mA
≤ 10 mA
≤ 10 μA
250
≤ 15 %
-25 ° C to 70 ° C
≤ 10 %
≤ 3 %
LED
yes
yes
yes
IP67
DIN EN 60947-5-2: 2008
2 m
DC 13
PVC grau LIYY



KJ4-Q15KN32-DPS

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Cable cross

3x0.14 mm²

Errors and omissions exceptet