


[Article Page](#)


Product Description

inductive sensor AC

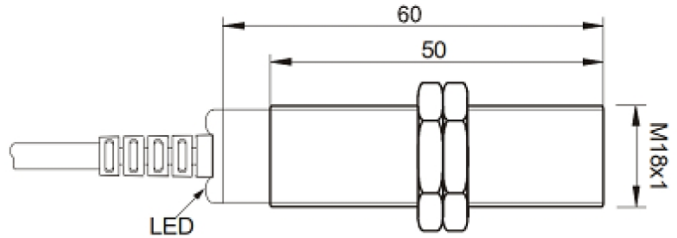


Name  
Order number  
Matchcode  
Switching distance  
Mounting


KJ5-M18MB60-AZÖ  
08317211300  
9921-1300  
5 mm

 shielded


Switch type

 N.C.  
AC

Signal Type  
Connection

 Cable

Connection diagramm

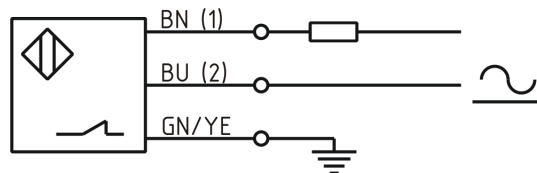

Dimension (in mm)  
Technical Specification

fine-pitch thread M18 x 60

Operating voltage  
Voltage drop  
Max. load current  
Leakage current  
Switching frequency  
Switching hysteresis  
Operating temperature  
Temperature drift  
Repeat accuracy  
Switching state  
Short-circuit proof  
Overload protection  
Reverse voltage protection  
Protection category  
EMC-level  
Material active face  
Termination

20 - 250 VAC  
5 V  
300 mA  
≤ 2 mA  
15  
≤ 15 %  
-25 ° C to 70 ° C  
≤ 10 %  
≤ 5 %  
LED  
yes  
yes  
yes  
IP67  
DIN EN 60947-5-2:2008  
PCB  
2m PVC 3x0,5mm<sup>2</sup>

