
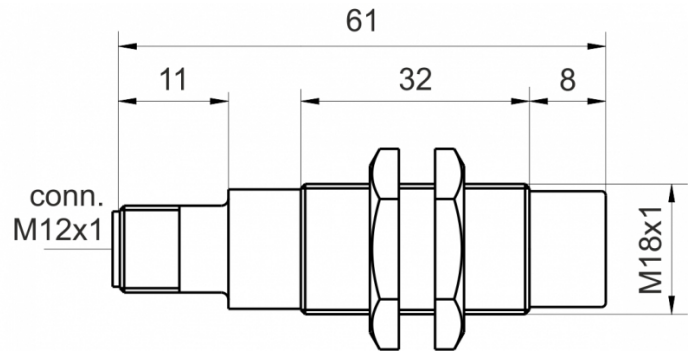


[Article Page](#)

Product Description

inductive sensor analogue

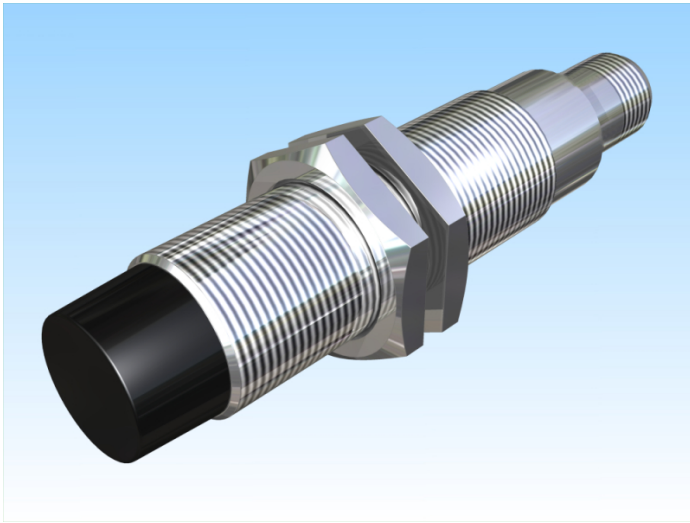


- Name
- Order number
- Switching distance
- Mounting


- Switch type

- Signal Type
- Connection
- Connection diagramm

KJ8-M18MN61-ANU-V2
08317144765
from 1 mm to 8 mm

 non shielded

 analog
Analog Voltage
connector M12

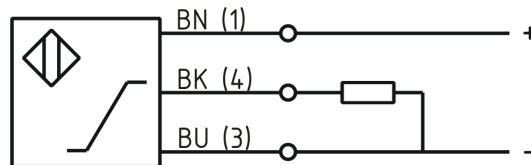

fine-pitch thread M18 x 61

- Dimension (in mm)
- Technical Specification
- Special features
- Operating voltage
- Max. ripple
- No load current
- Switching frequency
- Operating temperature
- Temperature drift
- Repeat accuracy
- Linearity
- Analog output
- Time delay
- Resolution
- Reverse voltage protection
- Protection category
- EMC-level
- Housing material
- Material active face
- Utilisation category
- Contact material
- Contact surface material
- Contact holder

Output Voltage 1 ... 9 Volt
11 - 35 VDC
≤ 10 %
≤ 5 mA
400 Hz
-25 ° C to 70 ° C
+/-5 %
≤ 1 %
≤ 5%
Pulso_has1
300 ms
1,143 V / mm
yes
IP67
DIN EN 60947-5-7:2004-06
Brass, nickel plated
PCB
DC 13
CuSn
NiAu
PA 6



KJ8-M18MN61-ANU-V2

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Nominal operating voltage

24 V DC

Termination

Connector M12 4pin

internal load

> 1 kOhm

FIT / MTTF acc. to SIEMENS 29500

89,13 / 1281y

Errors and omissions exceptet