



[Article Page](#)

Product Description

inductive sensor pressure resistant

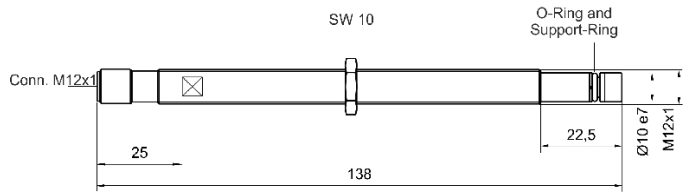

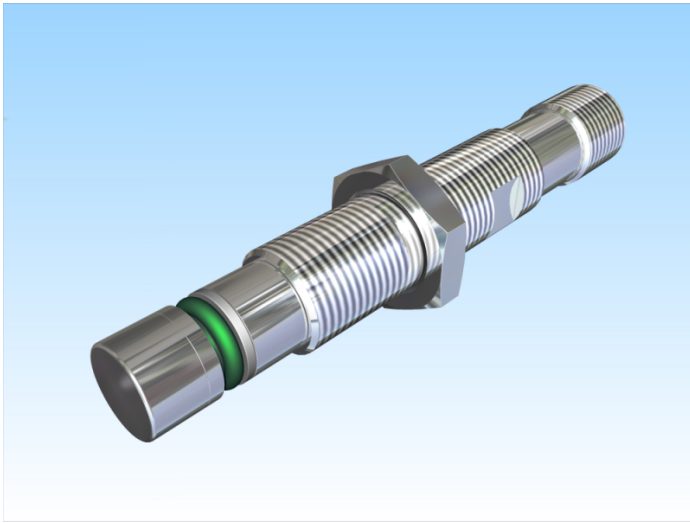

Name
Order number
Switching distance
Mounting


Switch type

Signal Type
Connection
Connection diagramm

KJD1,5-M12EB138-DPS-V2/300/22,5
08310001093
1,5 mm

 shielded

 N.O.
DC PNP
connector M12

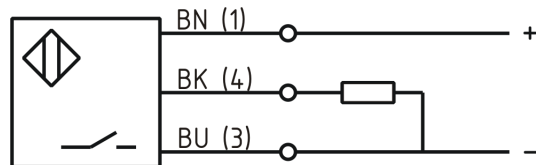

fine-pitch thread M12 x 138

Dimension (in mm)
Technical Specification
Special features

pressure: 300 bar
length pressure resistant area: 22,5 mm
10 - 30 V DC

Operating voltage
Voltage drop
Max. load current
No load current
Leakage current
Switching frequency
Switching hysteresis
Operating temperature
Temperature drift
Repeat accuracy
Short-circuit proof
Overload protection
Reverse voltage protection
Protection category
EMC-level
Housing material
Utilisation category

2,4 V
200 mA
≤ 10 mA
≤ 10 µA
400
≤ 15 %
-25 ° C to 100 ° C
≤ 10 %
≤ 5 %

yes
yes
yes
IP69K
DIN EN 60947-5-2: 2008
Stainless steel V2A
DC 13

Errors and omissions excepted

