


[Article Page](#)

Product Description

inductive sensor pressure resistant

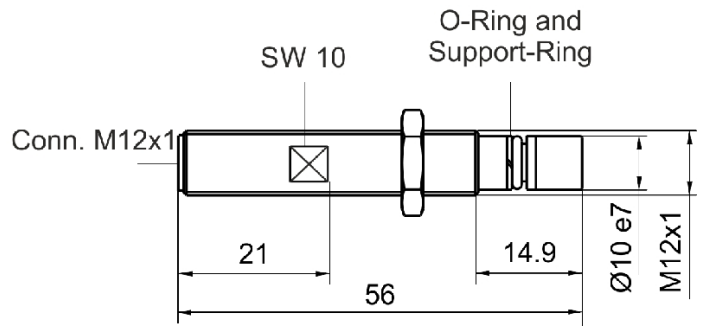


Name  
Order number  
Switching distance  
Mounting  
  
Switch type  
  
Signal Type  
Connection  
Connection diagramm

KJD2-M12EB56-DPÖ-V2/500/14,9  
08310002404  
2 mm

 shielded

 N.C.  
DC PNP  
connector M12

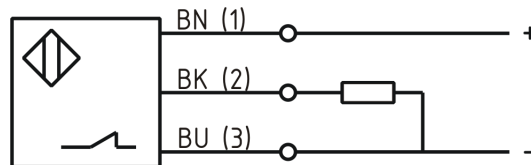

fine-pitch thread M12 x 56

Dimension (in mm)  
Technical Specification  
Special features

pressure: 500 bar  
length pressure resistant area: 14,9 mm  
10 - 30 V DC

Operating voltage  
Voltage drop  
Max. load current  
No load current  
Leakage current  
Switching frequency  
Switching hysteresis  
Operating temperature  
Temperature drift  
Repeat accuracy  
Short-circuit proof  
Overload protection  
Reverse voltage protection  
Protection category  
EMC-level  
Housing material  
Utilisation category

2,4 V  
200 mA  
≤ 10 mA  
≤ 10 µA  
400  
≤ 15 %  
-25 ° C to 90 ° C  
≤ 10 %  
≤ 5 %  
yes  
yes  
yes  
IP69K  
DIN EN 60947-5-2: 2008  
Stainless steel V2A  
DC 13

**Errors and omissions excepted**

