

[Article Page](#)

Product Description

Name

Order number

Matchcode

Mounting

Switch type

Signal Type

Connection


Connection diagramm

inductive ring sensor

KJR-D200AN-DPA-VE


08317060659

9706-0659

 non shielded

 Changeover
DC PNP

 Connector

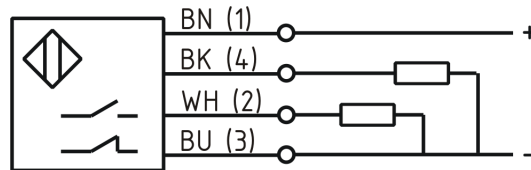

R 305 x 162 x 305

Dimension (in mm)

Technical Specification

Operating voltage

10 - 30 V DC

Max. ripple

≤ 10 %

Voltage drop

2,4 VDC

Max. load current

200 mA

No load current

10 mA

Leakage current

10 μA

Switching hysteresis

15 %

Operating temperature

-25 ° C to 70 ° C

Temperature drift

10 %

Switching state

LED

Digital output

Real sensitivity

15,0 mm Kugel Fe

Short-circuit proof

yes

Overload protection

yes

Reverse voltage protection

yes

Protection category

IP54

EMC-level

DIN EN 60947-5-2:2008

Housing material

Aluminum

Termination

Connector 4pol, Euchner connector

Errors and omissions excepted