

[Article Page](#)

Product Description

Name

one-way light barrier

Order number

KOES15M-M18MB71-DNU-IR

Matchcode

08363250228

Switch type

M18B-T015MN-CX9C4U2

100110

↓ Programmable

Signal Type

DC NPN


Illuminant

IR Infrared light 880 nm

Connection

☐ Cable

Connection diagramm

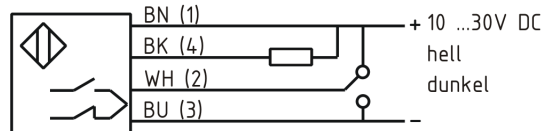

Technical Specification

Signal type

Throughbeam sensor

Operating voltage

10 - 30 V DC

Max. load current

200 mA

No load current

< 30 mA

Switching frequency

300

Operating temperature

-25 ° C to 55 ° C

Switching state

LED

Digital output

Measuring range

15 m

Sensitivity adjustable

ja

Sensing range adjustable

nein

Short-circuit proof

yes

Overload protection

yes

Reverse voltage protection

yes

Protection category

IP67

EMC-level

DIN EN 60947-5-2:2008

Termination

2m PVC 4x0,5mm²

Errors and omissions exceptet