

[Article Page](#)

Product Description

Name

Order number

Matchcode

Switch type

Signal Type

Illuminant

Connection

Connection diagramm

one-way light barrier

KOES15M-M18MB71-DPU-IR

08363250229

M18B-T015MP-CX-C4U2


100110

↓ Programmable

DC PNP

IR Infrared light 880 nm

— Cable

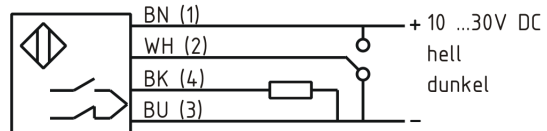

Technical Specification

Signal type

Operating voltage

Max. load current

No load current

Switching frequency

Operating temperature

Switching state

Digital output

Measuring range

Sensitivity adjustable

Sensing range adjustable

Short-circuit proof

Overload protection

Reverse voltage protection

Protection category

EMC-level

Termination

Throughbeam sensor

10 - 30 V DC

200 mA

< 30 mA

300

-25 ° C to 55 ° C

LED

15 m

ja

nein

yes

yes

yes

IP67

DIN EN 60947-5-2:2008

2m PVC 4x0,5mm<sup>2</sup>

**Errors and omissions excepted**