



[Article Page](#)

Product Description
 Name
 Order number
 Matchcode
 Illuminant
 Connection

one-way light barrier
 KOES3000-Q31KB-D-IR
 08363260001
 MP-T3000D-EX9C3L2
 IR Infrared light 880 nm

 Cable

Connection diagramm

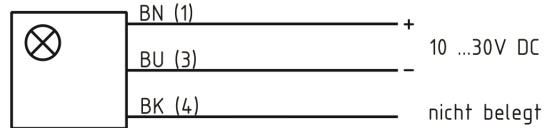

12 x 31 x 30

Dimension (in mm)
 Technical Specification
 Signal type
 Operating voltage
 Max. load current
 No load current
 Switching frequency
 Operating temperature
 Digital output
 Measuring range
 Sensitivity adjustable
 Sensing range adjustable
 Short-circuit proof
 Overload protection
 Reverse voltage protection
 Protection category
 EMC-level
 Housing material
 Termination

Throughbeam sensor
 10 - 30 V DC
 150 mA
 < 25 mA
 500
 -25 ° C to 70 ° C

3 m
 ja
 nein
 yes
 yes
 yes
 IP67
 DIN EN 60947-5-2:2008
 Plastic
 2m PVC 4x0,5mm²

Errors and omissions exceptet