

[Article Page](#)

Product Description

Name

Order number

Matchcode

Switch type

Signal Type

Illuminant

Connection


Connection diagramm

fibre optic device


KOLL-Q30KB-DNS/Ö-V1-RT


08365823564


9882-3564

 N.O.

DC NPN

 Red light 660 nm

 Connector

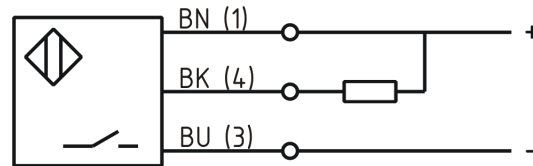

15 x 30 x 30

Dimension (in mm)

Technical Specification

Signal type

Operating voltage

Max. load current

No load current

Switching frequency

Operating temperature

Switching state

Digital output

Sensitivity adjustable

Sensing range adjustable

Short-circuit proof

Overload protection

Reverse voltage protection

Protection category

EMC-level

Housing material

Termination

Notes

Fibre-optic sensor

10 - 36 V DC

200 mA

< 15 mA

1000

-25 ° C to 55 ° C

LED

ja

nein

yes

yes

yes

IP65

DIN EN 60947-5-2:2008

Plastic

Connector M8 3pol

Funktion und Reichweite abhängig vom verwendeten Lichtleiter.

**Errors and omissions exceptet**