

[Article Page](#)

Product Description

Name

Order number

Matchcode

Switch type

Signal Type

Illuminant

Connection

Connection diagramm

fibre optic device
KOLL-Q30KB-DPA-RT
08365821000
9882-1000




Changeover

DC PNP

● Red light 660 nm



Cable

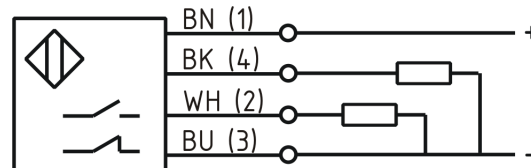

15 x 30 x 30

Dimension (in mm)

Technical Specification

Signal type

Operating voltage

Max. load current

No load current

Switching frequency

Operating temperature

Switching state

Digital output

Sensitivity adjustable

Sensing range adjustable

Short-circuit proof

Overload protection

Reverse voltage protection

Protection category

EMC-level

Housing material

Termination

Notes

Fibre-optic sensor

10 - 36 V DC

200 mA

< 15 mA

1000

-25 ° C to 55 ° C

LED

ja

nein

yes

yes

yes

IP67

DIN EN 60947-5-2:2008

Plastic

3m PVC 4x0,14mm²

max. Laststrom 200mA

(bei antivalent Summe beider Ausgänge)

Errors and omissions exceptet