

[Article Page](#)

Product Description

Name

Order number

Matchcode

Switch type

Signal Type

Illuminant

Connection

Connection diagramm

fibre optic device

KOLLTG-Q31KB-DMU-V2-RT

08361260522

MP-DGFD-CX6Q4UE




Switchable

DC PNP/NPN

● Red light 650 nm



Connector

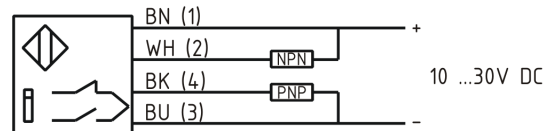

12 x 31 x 30

Dimension (in mm)

Technical Specification

Signal type

Fibre-optic sensor

Operating voltage

10 - 30 V DC

Max. load current

150 mA

No load current

< 25 mA

Switching frequency

500

Operating temperature

-25 ° C to 70 ° C

Switching state

LED

Digital output

ja

Sensitivity adjustable

nein

Sensing range adjustable

yes

Short-circuit proof

yes

Overload protection

yes

Reverse voltage protection

yes

Protection category

IP67

EMC-level

DIN EN 60947-5-2:2008

Housing material

Plastic

Termination

Connector M12 4pol

Notes

Glasfaser-Lichttaster

Errors and omissions excepted