

[Article Page](#)

Product Description

Name

Order number

Matchcode

Switching distance

Switch type

Signal Type

Illuminant

Connection

Connection diagramm

Dimension (in mm)

Technical Specification

Signal type

Operating voltage

Max. load current

No load current

Switching frequency

Operating temperature

Switching state

Digital output

Sensitivity adjustable

Sensing range adjustable

Short-circuit proof

Overload protection

Reverse voltage protection

Protection category

EMC-level

Termination

Notes

reflex light barrier for transparent objects

KORG500-Q32KB-DPU-RT

08362270008


RP32-L0500P-CY6C4U2-PD

500 mm


100110

 Programmable

DC PNP

 Red light 660 nm

 Cable

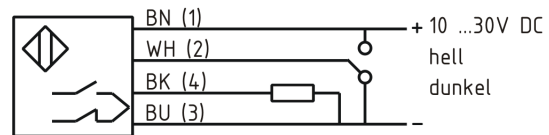

12 x 28.6 x 37

Retroreflective sensor

10 - 30 V DC

100 mA

< 30 mA

700

-20 ° C to 55 ° C

LED

ja

nein

yes

yes

yes

IP67

DIN EN 60947-5-2:2008

2m PVC 4x0,15mm<sup>2</sup>

Reflexlichtschranke für transparente Objekte

**Errors and omissions excepted**