


[Article Page](#)

Product Description


Name
Order number
Matchcode
Switching distance
Switch type

reflex light probe with background suppression
KORH200-M30MB78-DPA-IR
08361255017
M30B-D0200P-CX9C4U2-BS
200 mm




Signal Type
Illuminant
Connection

DC PNP
IR Infrared light 880 nm



Connection diagramm

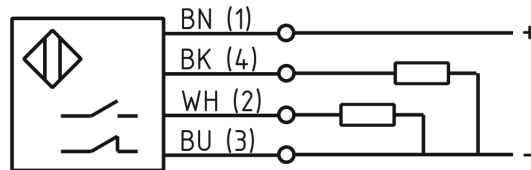

Technical Specification

Signal type
Operating voltage
Max. load current
No load current
Switching frequency
Operating temperature
Operating state
Switching state
Digital output
Sensitivity adjustable
Sensing range adjustable
Short-circuit proof
Overload protection
Reverse voltage protection
Protection category
EMC-level
Termination

Background suppression sensor
10 - 30 V DC
150 mA
< 30 mA
150
-25 ° C to 70 ° C
LED
LED
nein
ja
yes
yes
yes
yes
IP67
DIN EN 60947-5-2:2008
2m PVC 4x0,5mm²

Errors and omissions exceptet