




[Article Page](#)

Product Description
 Name
 Order number
 Matchcode
 Switch type


polarized reflex light barrier
 KORP1000-Q20KB-DPA-RT
 08362205006
 UP-L1000P-CX6C4U2-PF

 Changeover
 DC PNP
 Red light 680 nm

Signal Type
 Illuminant
 Connection

 Cable

Connection diagramm

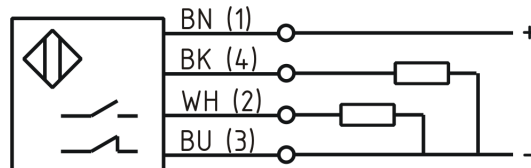

8 x 20 x 35

Dimension (in mm)
 Technical Specification
 Signal type
 Operating voltage
 Max. load current
 No load current
 Switching frequency
 Operating temperature
 Operating state
 Switching state
 Digital output
 Measuring range
 Sensitivity adjustable
 Sensing range adjustable
 Short-circuit proof
 Overload protection
 Reverse voltage protection
 Protection category
 EMC-level
 Housing material
 Termination

Polarized retroreflective sensor
 10 - 30 V DC
 150 mA
 < 25 mA
 300
 -20 ° C to 55 ° C
 LED
 LED

 1 m
 ja
 nein
 yes
 yes
 yes
 yes
 IP67
 DIN EN 60947-5-2:2008
 Plastic
 2m PVC 4x0,15mm²

Errors and omissions exceptet