

[Article Page](#)

Product Description

Name

Order number

Matchcode

Switch type

Signal Type

Illuminant

Connection

Connection diagramm

polarized reflex light barrier
 KORP1000W-M18MB75-DNU-RT
 08362250260
 M18B-L1000N-CZ6C4U2-PF


100110

↓ Programmable

DC NPN

● Red light 650 nm

— Cable

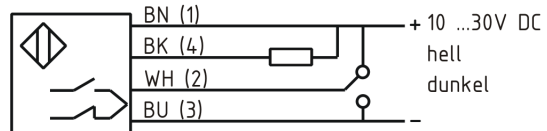

Technical Specification

Signal type

Operating voltage

Max. load current

No load current

Switching frequency

Operating temperature

Switching state

Digital output

Measuring range

Sensitivity adjustable

Sensing range adjustable

Short-circuit proof

Overload protection

Reverse voltage protection

Protection category

EMC-level

Termination

Polarized retroreflective sensor

10 - 30 V DC

200 mA

< 30 mA

300

-25 ° C to 55 ° C

LED

1 m

ja

nein

yes

yes

yes

IP67

DIN EN 60947-5-2:2008

2m PVC 4x0,5mm²

Errors and omissions excepted