

[Article Page](#)

Product Description
 Name
 Order number
 Matchcode
 Switch type

polarized reflex light barrier
 KORP13M-Q64KB-DNU-RT
 08362215000
 RP64-L013MN-CY6C4U2-PF

100110

↓ Programmable


DC NPN

● Red light 650 nm

— Cable

Signal Type
 Illuminant
 Connection

Connection diagramm

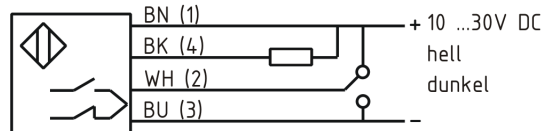

20 x 60 x 43

Dimension (in mm)
 Technical Specification
 Signal type
 Operating voltage
 Max. load current
 No load current
 Switching frequency
 Operating temperature
 Switching state
 Digital output
 Measuring range
 Sensitivity adjustable
 Sensing range adjustable
 Short-circuit proof
 Overload protection
 Reverse voltage protection
 Protection category
 EMC-level
 Housing material
 Termination

Polarized retroreflective sensor

10 - 30 V DC

100 mA

< 35 mA

700

-25 ° C to 55 ° C

LED

13 m

ja

nein

yes

yes

yes

IP67

DIN EN 60947-5-2:2008

Plastic

2m PVC 4x0,5mm²

Errors and omissions exceptet