

[Article Page](#)

Product Description

Name

Order number

Matchcode

Switch type

Signal Type

Illuminant

Connection

Connection diagramm

polarized reflex light barrier

KORP13M-Q64KB-DPU-RT

08362215001

RP64-L013MP-CY6C4U2-PF


100110

↓ Programmable

DC NPN

● Red light 650 nm

☐ Cable

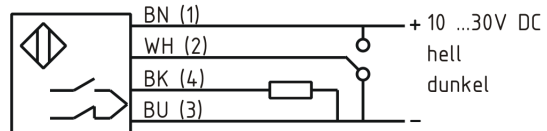

Q 20 x 60 x 43

Dimension (in mm)

Technical Specification

Signal type

Operating voltage

Max. load current

No load current

Switching frequency

Operating temperature

Switching state

Measuring range

Sensitivity adjustable

Sensing range adjustable

Short-circuit proof

Overload protection

Reverse voltage protection

Protection category

EMC-level

Housing material

Termination

Polarized retroreflective sensor

10 - 30 V DC

100 mA

< 35 mA

700

-25 ° C to 55 ° C

LED

13 m

ja

nein

yes

yes

yes

IP67

DIN EN 60947-5-2:2008

Plastic

2m PVC 4x0,5mm²

Errors and omissions exceptet