

[Article Page](#)

Product Description

Name

Order number

Matchcode

Switch type

Signal Type

Illuminant

Connection

Connection diagramm

polarized reflex light barrier

KORP2000-Q31KB-DMU-RT

08362260017

MP-L2000D-CX6C4U2-PF




Switchable

DC PNP/NPN

● Red light 650 nm



Cable

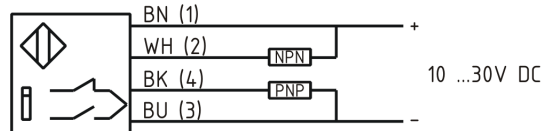

12 x 31 x 30

Dimension (in mm)

Technical Specification

Signal type

Polarized retroreflective sensor

Operating voltage

10 - 30 V DC

Max. load current

150 mA

No load current

< 25 mA

Switching frequency

500

Operating temperature

-25 ° C to 70 ° C

Switching state

LED

Digital output

Measuring range

2 m

Sensitivity adjustable

ja

Sensing range adjustable

nein

Short-circuit proof

yes

Overload protection

yes

Reverse voltage protection

yes

Protection category

IP67

EMC-level

DIN EN 60947-5-2:2008

Housing material

Plastic

Termination

2m PVC 4x0,5mm<sup>2</sup>

**Errors and omissions exceptet**