

[Article Page](#)

Product Description

Name

Order number

Matchcode

Switch type

Signal Type

Illuminant

Connection

Connection diagramm

polarized reflex light barrier

KORP4000-Q32KB-DPU-RT

08362270002

RP32-L4000P-CY6C4U2-PF


100110

↓ Programmable

DC PNP

● Red light 660 nm

☐ Cable

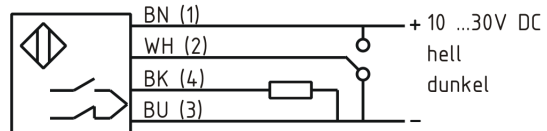

12 x 28.6 x 37

Dimension (in mm)

Technical Specification

Signal type

Polarized retroreflective sensor

Operating voltage

10 - 30 V DC

Max. load current

100 mA

No load current

< 30 mA

Switching frequency

700

Operating temperature

-20 ° C to 55 ° C

Switching state

LED

Digital output

Measuring range

4 m

Sensitivity adjustable

ja

Sensing range adjustable

nein

Short-circuit proof

yes

Overload protection

yes

Reverse voltage protection

yes

Protection category

IP67

EMC-level

DIN EN 60947-5-2:2008

Termination

2m PVC 4x0,15mm²

Errors and omissions exceptet