

[Article Page](#)

Product Description

Name

Order number

Matchcode

Switch type

Signal Type

Illuminant

Connection

Connection diagramm

reflex light barrier

KORS2000-M12MB75-DPA-V2-IR

08362245163

M12B-L2000P-CX9Q4UE




Changeover

DC PNP

IR Infrared light 880 nm



Connector

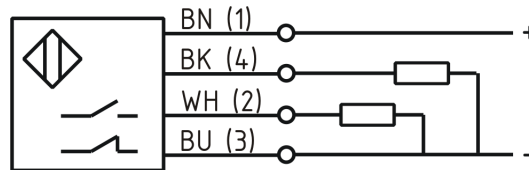

Technical Specification

Signal type

Retroreflective sensor

Operating voltage

10 - 30 V DC

Max. load current

150 mA

No load current

< 30 mA

Switching frequency

500

Operating temperature

-25 ° C to 70 ° C

Switching state

LED

Digital output

Measuring range

2 m

Sensitivity adjustable

ja

Sensing range adjustable

nein

Short-circuit proof

yes

Overload protection

yes

Reverse voltage protection

yes

Protection category

IP67

EMC-level

DIN EN 60947-5-2:2008

Termination

Connector M12 4pol

Errors and omissions exceptet