

[Article Page](#)

Product Description
 Name
 Order number
 Matchcode
 Switching distance
 Switch type

reflex light probe
 KORT130-Q31KB-DMU-V1-IR
 08361260021
 MP-D0130D-CX9Q4UP
 130 mm



Switchable


Signal Type
 Illuminant
 Connection

DC PNP/NPN
 IR Infrared light 880 nm



Connector

Connection diagramm

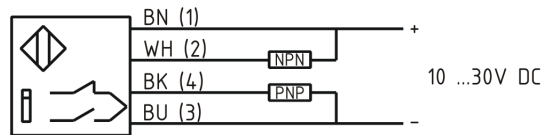

Dimension (in mm)
 Technical Specification

12 x 31 x 30

Signal type
 Operating voltage
 Max. load current
 No load current
 Switching frequency
 Operating temperature
 Switching state
 Digital output
 Sensitivity adjustable
 Sensing range adjustable
 Short-circuit proof
 Overload protection
 Reverse voltage protection
 Protection category
 EMC-level
 Housing material
 Termination

Diffuse mode sensor
 10 - 30 V DC
 150 mA
 < 25 mA
 500
 -25 ° C to 70 ° C
 LED

ja
 nein
 yes
 yes
 yes
 yes
 IP67
 DIN EN 60947-5-2:2008
 Plastic
 Connector M8 4pol

Errors and omissions exceptet