

[Article Page](#)

Product Description  
 Name  
 Order number  
 Matchcode  
 Switching distance  
 Switch type

reflex light probe  
 KORT130-Q31KB-DMU-V2-IR  
 08361260022  
 MP-D0130D-CX9Q4UE  
 130 mm



Switchable


Signal Type  
 Illuminant  
 Connection

DC PNP/NPN  
 IR Infrared light 880 nm



Connector

Connection diagramm

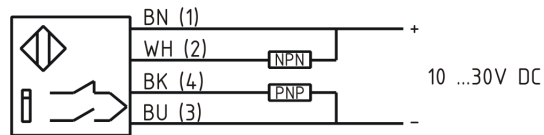

12 x 31 x 30

Dimension (in mm)  
 Technical Specification  
 Signal type  
 Operating voltage  
 Max. load current  
 No load current  
 Switching frequency  
 Operating temperature  
 Switching state  
 Digital output  
 Sensitivity adjustable  
 Sensing range adjustable  
 Short-circuit proof  
 Overload protection  
 Reverse voltage protection  
 Protection category  
 EMC-level  
 Housing material  
 Termination

Diffuse mode sensor  
 10 - 30 V DC  
 150 mA  
 < 25 mA  
 500  
 -25 ° C to 70 ° C  
 LED

ja  
 nein  
 yes  
 yes  
 yes  
 IP67  
 DIN EN 60947-5-2:2008  
 Plastic  
 Connector M12 4pol

**Errors and omissions exceptet**