

[Article Page](#)

Product Description  
 Name  
 Order number  
 Matchcode  
 Switching distance  
 Switch type

reflex light probe  
 KORT300-Q31KB-DMU-IR  
 08361260001  
 MP-D0300D-CX9C4U2  
 300 mm



Switchable


Signal Type  
 Illuminant  
 Connection

DC PNP/NPN  
 IR Infrared light 880 nm



Cable

Connection diagramm

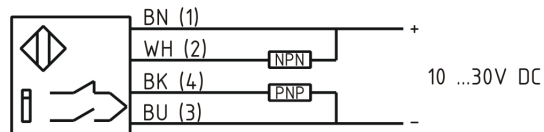

Dimension (in mm)  
 Technical Specification  
 Signal type  
 Operating voltage  
 Max. load current  
 No load current  
 Switching frequency  
 Operating temperature  
 Switching state  
 Digital output  
 Sensitivity adjustable  
 Sensing range adjustable  
 Short-circuit proof  
 Overload protection  
 Reverse voltage protection  
 Protection category  
 EMC-level  
 Housing material  
 Termination

12 x 31 x 30  
 Diffuse mode sensor  
 10 - 30 V DC  
 150 mA  
 < 25 mA  
 500  
 -25 ° C to 70 ° C  
 LED  
 ja  
 nein  
 yes  
 yes  
 yes  
 IP67  
 DIN EN 60947-5-2:2008  
 Plastic  
 2m PVC 4x0,5mm<sup>2</sup>

**Errors and omissions exceptet**