

[Article Page](#)

Product Description
 Name
 Order number
 Matchcode
 Switching distance
 Switch type

reflex light probe
 KORT300-Q31KB-DMU-V1-IR
 08361260005
 MP-D0300D-CX9Q4UP
 300 mm



Switchable


Signal Type
 Illuminant
 Connection

DC PNP/NPN
 IR Infrared light 880 nm



Connector

Connection diagramm

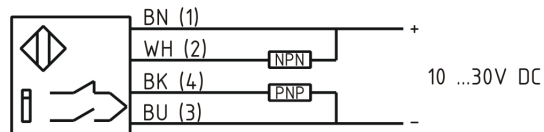

Dimension (in mm)
 Technical Specification
 Signal type
 Operating voltage
 Max. load current
 No load current
 Switching frequency
 Operating temperature
 Switching state
 Digital output
 Sensitivity adjustable
 Sensing range adjustable
 Short-circuit proof
 Overload protection
 Reverse voltage protection
 Protection category
 EMC-level
 Housing material
 Termination

12 x 31 x 30
 Diffuse mode sensor
 10 - 30 V DC
 150 mA
 < 25 mA
 500
 -25 ° C to 70 ° C
 LED
 ja
 nein
 yes
 yes
 yes
 IP67
 DIN EN 60947-5-2:2008
 Plastic
 Connector M8 4pol

Errors and omissions exceptet