

[Article Page](#)

Product Description
 Name
 Order number
 Matchcode
 Switching distance
 Switch type

reflex light probe
 KORT380-Q31KB-DMU-IR
 08361260033
 MP-D0380D-CX9C4U2
 380 mm



Switchable


Signal Type
 Illuminant
 Connection

DC PNP/NPN
 IR Infrared light 880 nm



Cable

Connection diagramm

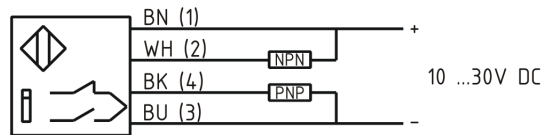

Dimension (in mm)
 Technical Specification

12 x 31 x 30

Signal type
 Operating voltage

Diffuse mode sensor
 10 - 30 V DC

Max. load current
 No load current

150 mA
 < 25 mA

Switching frequency
 Operating temperature

500
 -25 ° C to 70 ° C

Switching state
 Digital output

LED

Sensitivity adjustable
 Sensing range adjustable

ja
 nein

Short-circuit proof
 Overload protection

yes
 yes

Reverse voltage protection
 Protection category

yes

EMC-level
 Housing material

IP67
 DIN EN 60947-5-2:2008
 Plastic

Termination

2m PVC 4x0,5mm²

Errors and omissions exceptet