


[Article Page](#)

Product Description


ultrasonic sensor

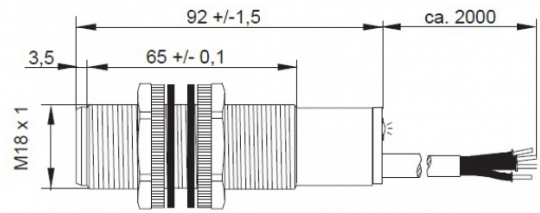


Name
Order number
Matchcode
art_schaltabstand_einstellbar
Switch type

KURS1500-M18KB90-DPS
08409843500
9984-3500
yes


Signal Type
Connection

 N.O.
DC PNP

Connection diagramm

 Cable

Dimension (in mm)
Technical Specification

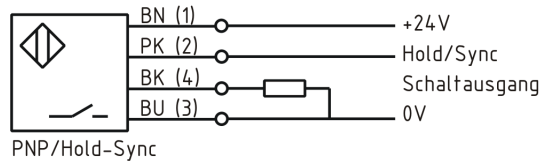

PNP/Hold-Sync
M18 x 92

Signal type
Operating voltage
Max. load current
No load current
Switching frequency
Operating temperature
Switching state
Carrier frequency
Sound beam
Working range
Short-circuit proof
Overload protection
Reverse voltage protection
Protection category
EMC-level
Housing material
Termination

Retro Reflective Sensor
18 - 30 VDC
500 mA
≤ 35 mA
8 Hz
-15 ° C to 70 ° C
LED
180 kHz
ca. 8°
from 30 to 150 cm
yes
yes
yes
IP67
DIN EN 60947-5-2:2008
Plastic
2m PVC 4x0,25mm²

Errors and omissions exceptet