


[Article Page](#)

Product Description


ultrasonic sensor

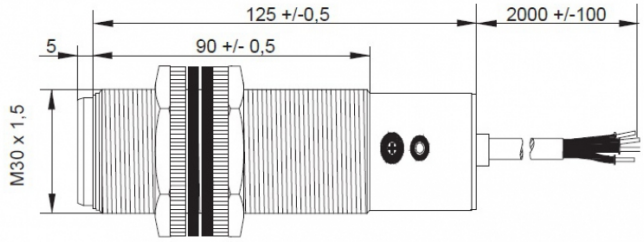


Name
Order number
Matchcode
art_schaltabstand_einstellbar
Switch type

KURS2500-M30KB118-DPS
08409861400
9986-1400
yes


Signal Type
Connection

 N.O.
DC PNP

Connection diagramm

 Cable

Dimension (in mm)
Technical Specification
Signal type
Operating voltage
Max. load current
No load current
Switching frequency
Operating temperature
Swiching state
Carrier frequency
Sound beam
Pulse rate of rise
Working range
Short-circuit proof
Overload protection
Reverse voltage protection
Protection category
EMC-level
Housing material
Termination

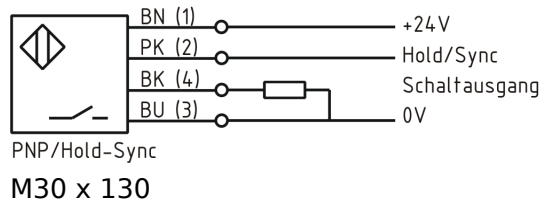

Retro Reflective Sensor
18 - 30 VDC
500 mA
≤ 35 mA
1 Hz
-15 ° C to 70 ° C
LED
130 kHz
ca. 8°
Potentiometer
from 30 to 250 cm
yes
yes
yes
IP67
DIN EN 60947-5-2:2008
Plastic
2m PVC 4x0,25mm²



KURS2500-M30KB118-DPS

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Errors and omissions excepted