


[Article Page](#)

Product Description

ultrasonic sensor

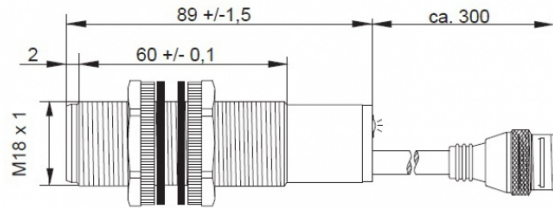

Name
Order number
Matchcode
art_schaltabstand_einstellbar
Switch type

KURS600-M18KB90-DPS-V2
08409843430
9984-3430
yes


Signal Type
Connection

N.O.
DC PNP

Connection diagramm

Connector

Dimension (in mm)
Technical Specification
Signal type
Operating voltage
Max. load current
No load current
Switching frequency
Operating temperature
Switching state
Carrier frequency
Sound beam
Pulse rate of rise
Working range
Short-circuit proof
Overload protection
Reverse voltage protection
Protection category
EMC-level
Housing material
Termination

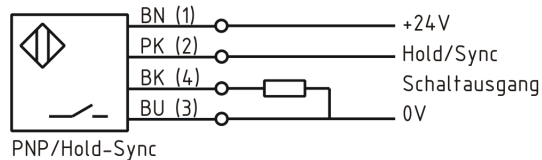

PNP/Hold-Sync

M18 x 92

Retro Reflective Sensor
18 - 30 VDC
500 mA
≤ 20 mA
25 Hz
-15 ° C to 70 ° C
LED
300 kHz
ca. 8°
Potentiometer
from 25 to 60 cm
yes
yes
yes
IP67
DIN EN 60947-5-2:2008
Plastic
Connector M12 4pol

Errors and omissions exceptet