


[Article Page](#)

Product Description


ultrasonic sensor

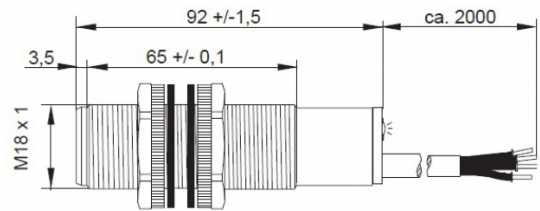


Name  
Order number  
Matchcode  
art\_schaltabstand\_einstellbar  
Switch type

KURS600-M18KB90-DPS  
08409843400  
9984-3400  
yes


Signal Type  
Connection

 N.O.  
DC PNP

Connection diagramm

 Cable

Dimension (in mm)  
Technical Specification  
Signal type  
Operating voltage  
Max. load current  
No load current  
Switching frequency  
Operating temperature  
Switching state  
Carrier frequency  
Sound beam  
Working range  
Short-circuit proof  
Overload protection  
Reverse voltage protection  
Protection category  
EMC-level  
Housing material  
Termination

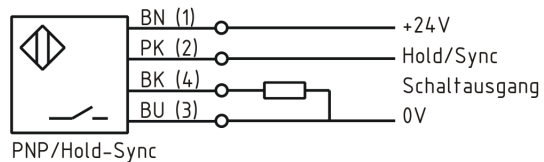

PNP/Hold-Sync

M18 x 92

Retro Reflective Sensor  
18 - 30 VDC  
500 mA  
≤ 20 mA  
25 Hz  
-15 ° C to 70 ° C  
LED  
300 kHz  
ca. 8°  
from 25 to 60 cm  
yes  
yes  
yes  
IP67  
DIN EN 60947-5-2:2008  
Plastic  
2m PVC 4x0,25mm<sup>2</sup>

**Errors and omissions exceptet**