


[Article Page](#)

Product Description

ultrasonic sensor

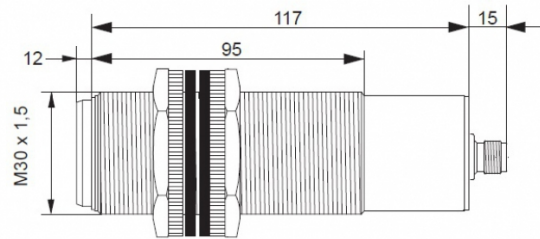

Name

KURT1000-M30MB127-ANU-V2/1


Order number

08407665163


Matchcode

9966-5163

Mounting

 shielded

Switch type


 analog
Analog Voltage

Signal Type

Connection

 Connector

Connection diagramm

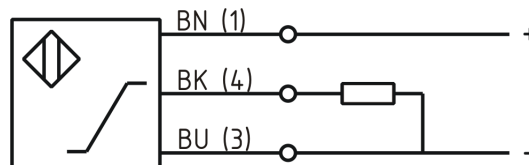

Technical Specification

Signal type

Background suppression sensor

Operating voltage

18 - 30 VDC

Max. load current

400 mA

Operating temperature

-10 ° C to 60 ° C

Linearity

0,3 %

Switching state

LED

Analog output

Pulso_has11-9V

Time delay

100 ms

Carrier frequency

200 kHz

Sound beam

ca. 8

Measuring range

30-100 cm

Short-circuit proof

yes

Overload protection

yes

Reverse voltage protection

yes

Protection category

IP67

EMC-level

DIN EN 60947-5-7:2004-06

Housing material

Brass, nickel plated

Termination

Connector M12 4pol

Errors and omissions exceptet