


[Article Page](#)

Product Description

ultrasonic sensor

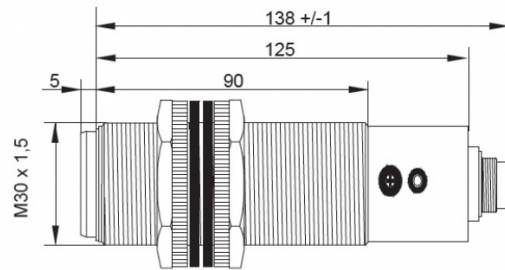


Name
Order number
Matchcode
art_schaltabstand_einstellbar
Signal Type
Connection

KURT1500-M30EB138-ANI-DPA-RS
08409667500
9966-7500
yes
4-20mA PNP

Connection diagramm

 Connector

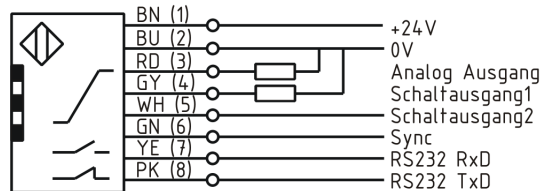

Dimension (in mm)
Technical Specification
Signal type
Operating voltage
Max. load current
No load current
Switching frequency
Switching hysteresis
Operating temperature
Repeat accuracy
Linearity
Operating state
art_schnittstelle
Time delay
Carrier frequency
Sound beam
Pulse rate of rise
Measuring range
Short-circuit proof
Overload protection
Reverse voltage protection
Protection category
EMC-level
Housing material

M30 x 125

Taster
19 - 30 VDC
100 mA
≤ 25 mA
30 Hz
programmierbar
-15 ° C to 70 ° C
0,4% | +/- 2mm
0,5% / 3 mm
LED
RS232
100 ms
220 kHz
ca. 10°
programmierbar
150-1500 mm
yes
yes
yes
IP65
DIN EN 60947-5-7:2004-06/DIN EN 60947-5-2:2008
Stainless steel V2A



KURT1500-M30EB138-ANI-DPA-RS

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Termination

Connector 8pol, type Binder 680

Errors and omissions exceptet