



[Article Page](#)

Product Description

ultrasonic sensor

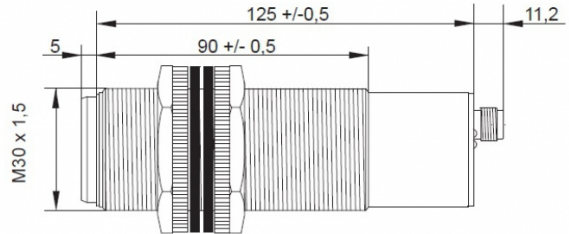


Name  
Order number  
Matchcode  
art\_schaltabstand\_einstellbar  
Switch type  
  
Signal Type  
Connection

KURT1500-M30KB125-ANU-DPA-V2  
08409862663  
9986-2663  
yes  
 analog/digital  
0-10V PNP

Connection diagramm

 Connector

Dimension (in mm)  
Technical Specification  
Signal type  
Operating voltage  
Max. load current  
No load current  
Switching frequency  
Switching hysteresis  
Operating temperature

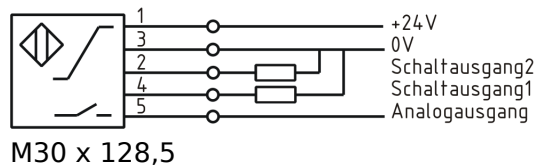

M30 x 128,5

Repeat accuracy  
Linearity  
Operating state  
Switching state  
Analog output  
Time delay  
Carrier frequency  
Sound beam  
Pulse rate of rise  
Measuring range  
Short-circuit proof  
Overload protection  
Reverse voltage protection  
Protection category  
EMC-level  
Housing material

Taster  
19 - 30 VDC  
100 mA  
45 mA  
1 Hz  
1 %  
-15 ° C to 70 ° C  
+/- 0,4% | +/- 2mm  
+/- 0,5 %  
LED  
LED  
Pulso\_has1  
300 ms  
200 kHz  
ca. 8°  
teach in  
15-150 cm  
yes  
yes  
yes  
IP67  
DIN EN 60947-5-7:2004-06/DIN EN 60947-5-2:2008  
Plastic



## KURT1500-M30KB125-ANU-DPA-V2

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Termination

Connector M12 5pol

**Errors and omissions exceptet**