


[Article Page](#)


Product Description

ultrasonic sensor

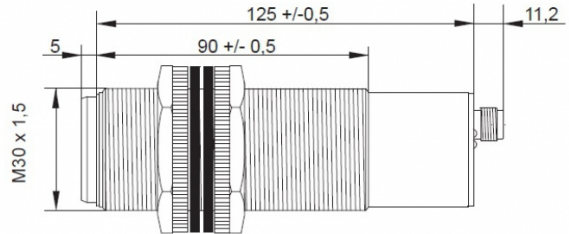

Name  
Order number  
Matchcode  
art\_schaltabstand\_einstellbar  
Switch type


KURT2000-M30KB125-ANU-DPA-V2  
08409861063  
9986-1063  
yes

 analog/digital  
0-10V PNP

Signal Type  
Connection

 Connector

Connection diagramm

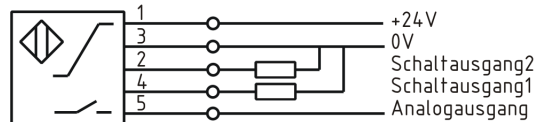

M30 x 128,5

Dimension (in mm)  
Technical Specification  
Signal type  
Operating voltage  
Max. load current  
Switching frequency  
Switching hysteresis  
Operating temperature  
Repeat accuracy  
Linearity  
Operating state  
Switching state  
Analog output  
Time delay  
Carrier frequency  
Sound beam  
Pulse rate of rise  
Measuring range  
Short-circuit proof  
Overload protection  
Reverse voltage protection  
Protection category  
EMC-level  
Housing material  
Termination

Taster  
19 - 30 VDC  
100 mA  
1 Hz  
1 %  
-15 ° C to 70 ° C  
+/- 0,4% | +/- 2mm  
0,5 %  
LED  
LED  
Pulso\_has1  
300 ms  
180 kHz  
ca. 8  
teach in  
25-200 cm  
yes  
yes  
yes  
IP67  
DIN EN 60947-5-7:2004-06/DIN EN 60947-5-2:2008  
Plastic  
Connector M12 5pol

**Errors and omissions exceptet**